

REV NO/版本	REVISION NOTE/修订注释	DATE/日期	SIGNATURE/签名

ELECTRICAL CHARACTERISTICS

- RATING: DC 50V 0.5A
- CONTACT RESISTANCE: 100mΩ MAX
- INSULATION RESISTANCE: 100MΩ MIN
- DIELECTRIC STRENGTH: AC 250V (50°60Hz)/60S


MECHANICAL CHARACTERISTICS

- PRACTICAL TEMPERATURE RANG: -40℃~+85℃
- OPERATING FORCE: 180±50gf
- MECHANICAL LIFE: 30,000 cycles

8				
7	TERMINAL	BRASS STRIP	6 Ag PLATED	
6	CASE	PPA	1 WHITE	
5	LOCK PIN	SUS WIRE	1 NATURAL	
4	SPRING	SUS WIRE	1 NATURAL	
3	CONTACT	PBS	2 Ag PLATED	
2	KNOB	PA6T	1 WHITE	
1	COVER	PA6T	1 BLACK	
NO.	PART NAME	MATERIAL	QTY.	FINISHING

东莞市迪松电子科技有限公司

GENERAL TOLERANCE 未注公差		TITLE	
X ± 0.15	X* ± 0°	PB-22E60A自锁	
.X ± 0.10	.X* ± 0°	PART NO. 零件编号	DWG NO. 图框编号
.XX ± 0.05	.XX* ± 1°	PB-22E60A	
.XXX ± 0.02	.XXX* ± 0.5°	APPROVAL 审批	
CHECKED 核准	DESIGN 设计	UNIT 单位 (mm)	SCALE 比例
苏维敏	苏维敏	1:1	REV.

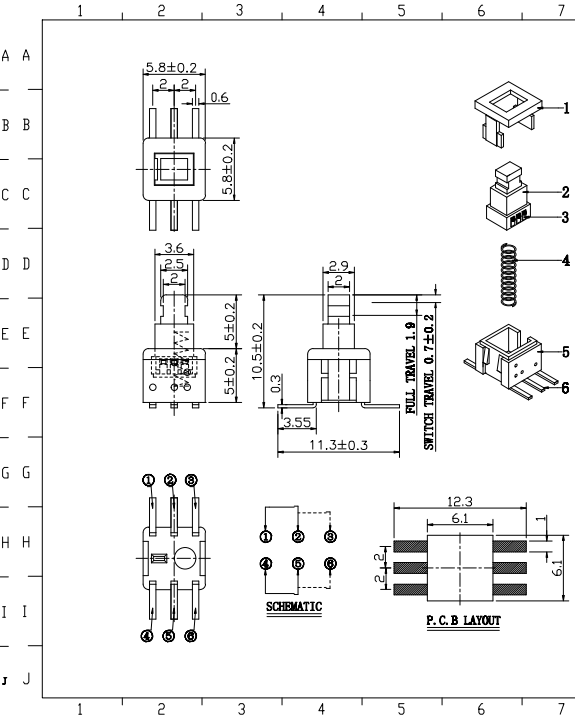

REV NO/版本	REVISION NOTE/修订注释	DATE/日期	SIGNATURE/签名

ELECTRICAL CHARACTERISTICS

- RATING: DC 50V 0.5A
- CONTACT RESISTANCE: 100mΩ MAX
- INSULATION RESISTANCE: 100MΩ MIN
- DIELECTRIC STRENGTH: AC 250V (50°60Hz)/60S

MECHANICAL CHARACTERISTICS

- PRACTICAL TEMPERATURE RANG: -40℃~+85℃
- OPERATING FORCE: 180±50gf
- MECHANICAL LIFE: 20,000 cycles

8				
7				
6	TERMINAL	BRASS	6 Ag PLATED	
5	CASE	PPA	1 WHITE	
4	SPRING	SUS WIRE	1 NATURAL	
3	CONTACT	BRONZE	2 Ag PLATED	
2	KNOB	PPA	1 WHITE	
1	COVER	PPA	1 BLACK	
NO.	PART NAME	MATERIAL	QTY.	FINISHING

东莞市迪松电子科技有限公司

GENERAL TOLERANCE 未注公差		TITLE	
X ± 0.6	X* ± 0°	PB-22E60A无锁	
.X ± 0.3	.X* ± 0°	PART NO. 零件编号	DWG NO. 图框编号
.XX ± 0.2	.XX* ± 1°	PB-22E60A	
.XXX ± 0.1	.XXX* ± 0.5°	APPROVAL 审批	
CHECKED 核准	DESIGN 设计	UNIT 单位 (mm)	SCALE 比例
苏维敏	苏维敏	1:1	REV.