



1 2 3 4 5 6 7 8 9 10 11 12

REV NO/版次	REVISION NOTE/修订注释	DATE/日期	SIGNATURE/签名

A
B
C
D
E
F
G
H
I
J








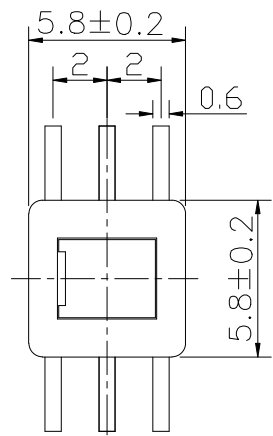


ELECTRICAL CHARACTERISTICS

1. RATING: DC 50V 0.5A
2. CONTACT RESISTANCE: 100mΩ MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC STRENGTH: AC 250V (50~60Hz)/60S

MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
2. OPERATING FORCE: 180±50gf
3. MECHANICAL LIFE: 20,000 cycles

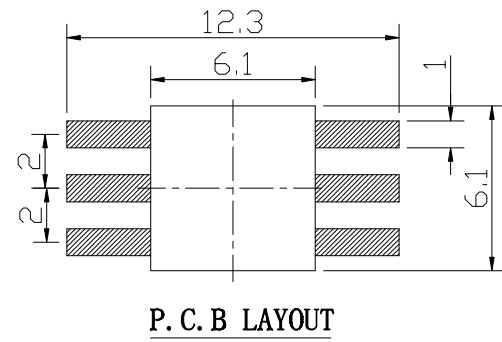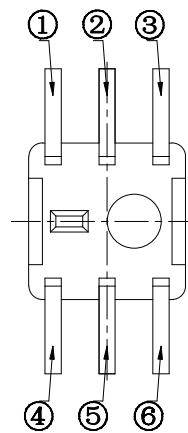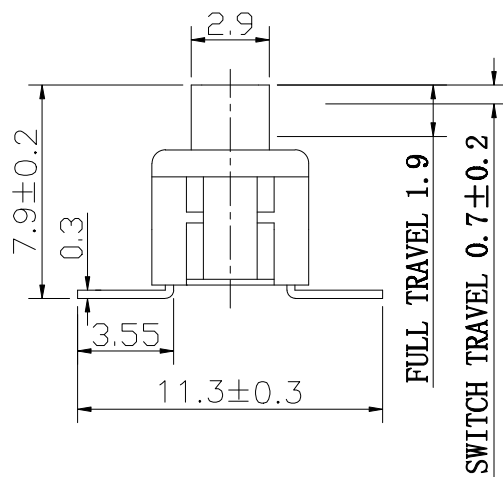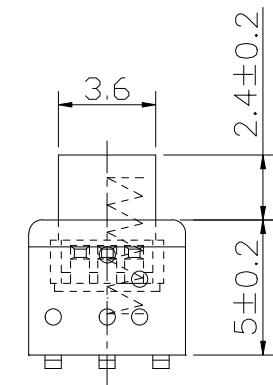

NO.	PART NAME	MATERIAL	QTY.	FINISHING
8				
7				
6	TERMINAL	BRASS	6	Ag PLATED
5	CASE	PPA	1	WHITE
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PPA	1	WHITE
1	COVER	PPA	1	BLACK

东莞市迪松电子科技有限公司

GENERAL TOLERANCE未指的公差		TITLE	
X. ± 0.5	X.° ± 5°	名称 PB-22E61A无锁	
.X ± 0.3	.X° ± 2°	PART NO. 零件编号	
.XX ± 0.2	.XX° ± 1°	DWG NO. 图纸编号	
.XXX ± 0.1	.XXX° ± 0.5°	PB-22E61A	
APPROVAL 审批	CHECKED 核准	DRAWN 设计	UNIT 单位 (mm)
		苏维敏	SCALE 比例
			1:1
			PROJ. 项目
			REV. 版本

1 2 3 4 5 6 7 8 9 10 11