
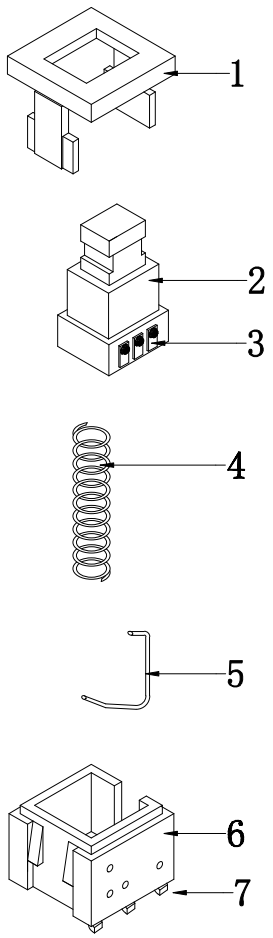


1 2 3 4 5 6 7 8 9 10 11 12

REV NO/版次	REVISION NOTE/修订注释	DATE/日期	SIGNATURE/签名

A  
B  
C  
D  
E  
F  
G  
H  
I  
J

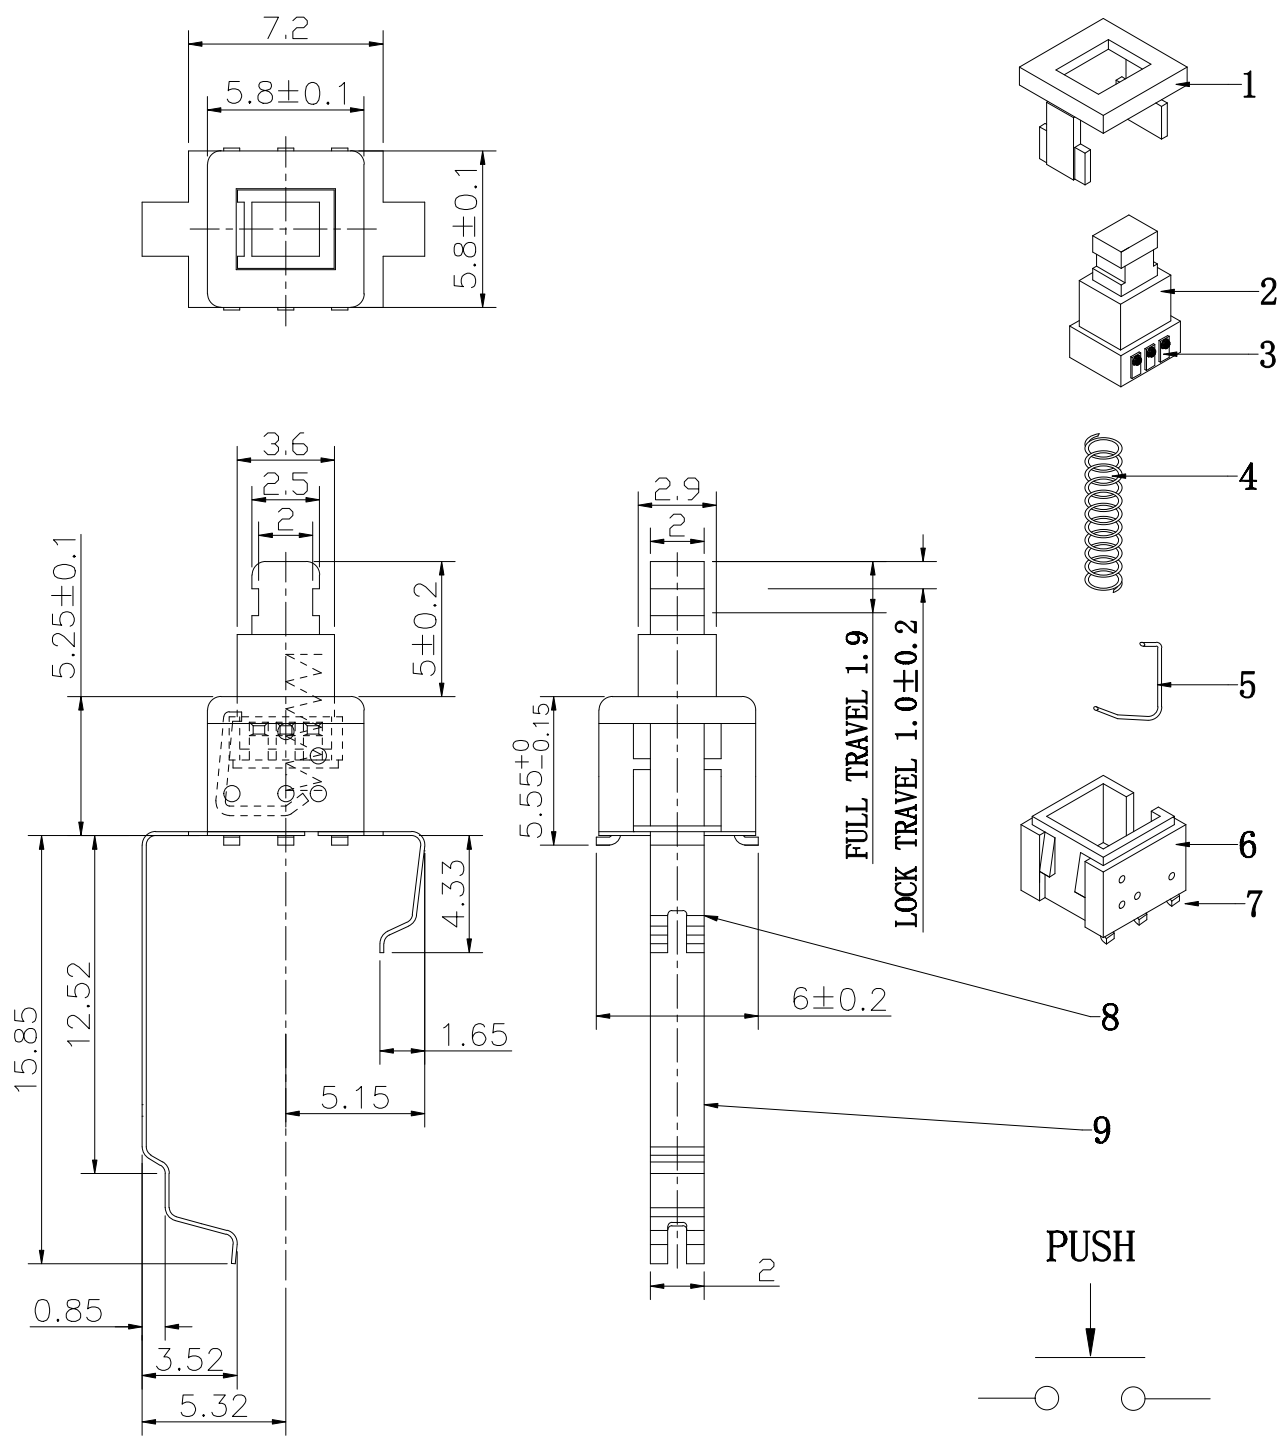

**ELECTRICAL CHARACTERISTICS**

1. RATING: DC 50V 0.5A
2. CONTACT RESISTANCE: 100mΩ MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC STRENGTH: AC 250V (50~60Hz)/60S

**MECHANICAL CHARACTERISTICS**

1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
2. OPERATING FORCE: 180±50gf
3. MECHANICAL LIFE: 20,000 cycles

NO.	PART NAME	MATERIAL	QTY.	FINISHING
9	CONTACTPIECE-2	SUS	1	NATURAL
8	CONTACTPIECE-1	SUS	1	NATURAL
7	TERMINAL	BRASS STRIP	6	Ag PLATED
6	CASE	PA66	1	GRAY
5	LOCK PIN	SUS WIRE	1	NATURAL
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PBT	1	WHITE
1	COVER	PPA	1	BLACK

东莞市迪松电子科技有限公司

GENERAL TOLERANCE未指的公差		TITLE 名称 PB-22E67自锁			
X. ± 0.5	X.° ± 5°	PART NO. 零件编号		DWG NO. 图纸编号	
.X ± 0.3	.X° ± 2°	PB-22E67		PB-22E67	
.XX ± 0.2	.XX° ± 1°	DRAWN 设计	UNIT 单位 (mm)	SCALE 比例	PROJ. 项目
.XXX ± 0.1	.XXX° ± 0.5°	CHECKED 核准	1:1	1:1	REV.

1 2 3 4 5 6 7 8 9 10 11