

REV.	ECN. NO.	APPD.


Notes:

1. Dimension shall be interpreted per ASME Y14.5M1994.
2. Dimension marked ∇ & $\blacktriangledown$ should be checked by Q.C. and process, engineers and ∇ should also check the CPK data.

Specification:

1. Current Rating: 1.0 AMP
2. Voltage Rating: 30V AC,DC
3. Dielectric Strength: 500V AC RMS for 1 minute.
4. Contact Resistance: 30 m Ω Max.
5. Insulator Resistance: 500M Ω Min. AT 250V DC.
6. Mating/Unmating cycles: 2000cycles
7. Temperature: -20°C to +60°C

PCB OUT LINE

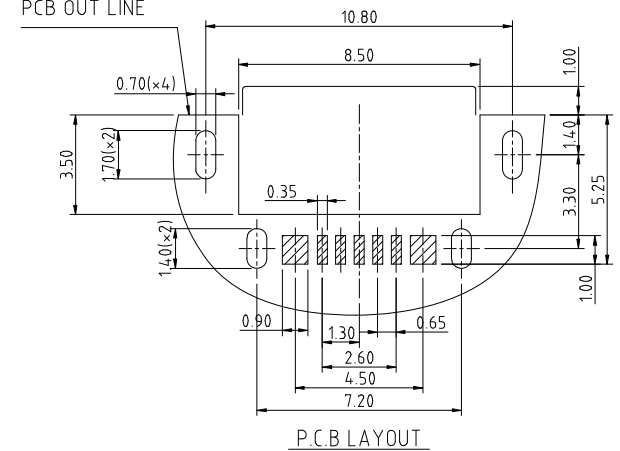

P.C.B LAYOUT

3	Shell	1	C2680R-H Au/Ni Plating T=0.30mm	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	
1	Housing	1	PA9T&LCP (G.F30%) Black	
ITEM	PART NAME	Q'TY	FINISH	NOTE
X. ± 0.50	X.° $\pm 2^\circ$	UNITS	东莞市迪松电子科技有限公司	
X ± 0.30	X.° $\pm 1^\circ$	mm		
.XX ± 0.10	.XX° $\pm 0.5^\circ$	MAT'L		
.XXX ± 0.05				
DISONG		FINISH	PART NO. (INTENDED USE)	TITLE: Micro USB 5Pin SMT Type (沉板平口防水型)
		Q'TY	APPD:	DWG NO.: USB-401
			CHKD:	
			DR: Steven.Xie 2012/08/18	SCALE SHEET REV. 1/1 1/1 A1

