

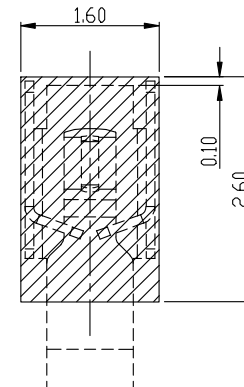


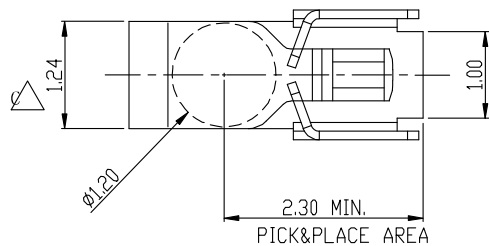



Rev.	ECN Number	Description	Date	Drawn	Checkd	Approved
B		尺寸修改	2018. 10. 11	陈南极		
C		尺寸修改	2019. 07. 25	陈南极		

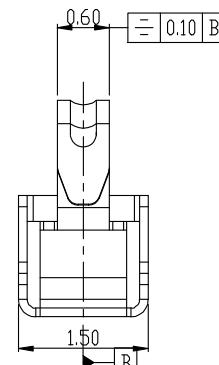

RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05MM

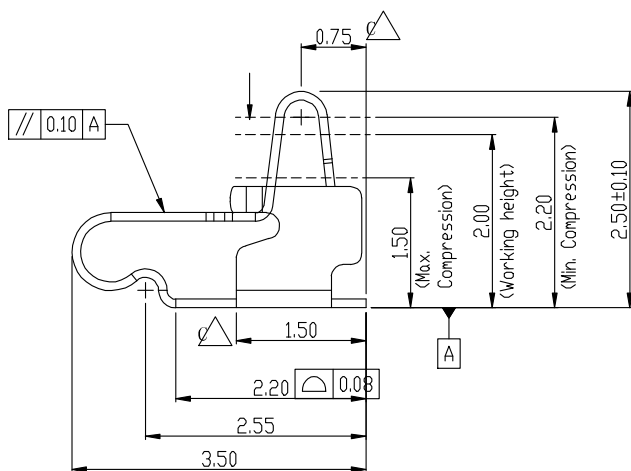

State at
working height 2.00mm

- NOTES:
- 1:MATERIAL:
1-1: STAINLESS STEEL,T=0.10mm.
 - 2:FINISH:
2-1: 3u" MIN. Au PLATING ON CONTACT AREA,
GOLD FLASH PLATING ON SOLDER AREA,
50~150u" NICKEL UNDERPLATING OVER ALL.
 - 3:SPECIFICATIONS:
3-1.CONTACT RESISTANCE:50mΩ MAX.
3-2.OPERATING TEMPERATURE: -20℃~+65℃.
3-3.PRE-LOAD FORCE:0.45N ON CONTACT POINT.
3-4.FORCE MAX. DEFLECTION:0.70N ON CONTACT POINT.
3-5.MAX.BEAM DEFLECTION:1.00mm. ON CONTACT POINT.
 - 4:DURABILITY: 100 CYCLES.
 - 5:PACKING SPECIFICATION:REEL&TAPE

DISONG

GENERAL TOLERANCE

XX. ±0.50	
X. ±0.35	X° ±2.0°
.X ±0.25	.X° ±1.0°
.XX ±0.15	.XX° ±0.5°

SCALE:

1:1

UNIT:

mm

SHEET:

A4



DRAWN

Chen

CHECK

APPROVE

DATE

DATE

DATE

DWG. NO.

PARTS NO.(INTENDED USE)
AS-003A

TITLE

RF Antenna Spring,SMT,
L3.5*W1.5*H2.5mm

REV.

B

SHEET
1/2