


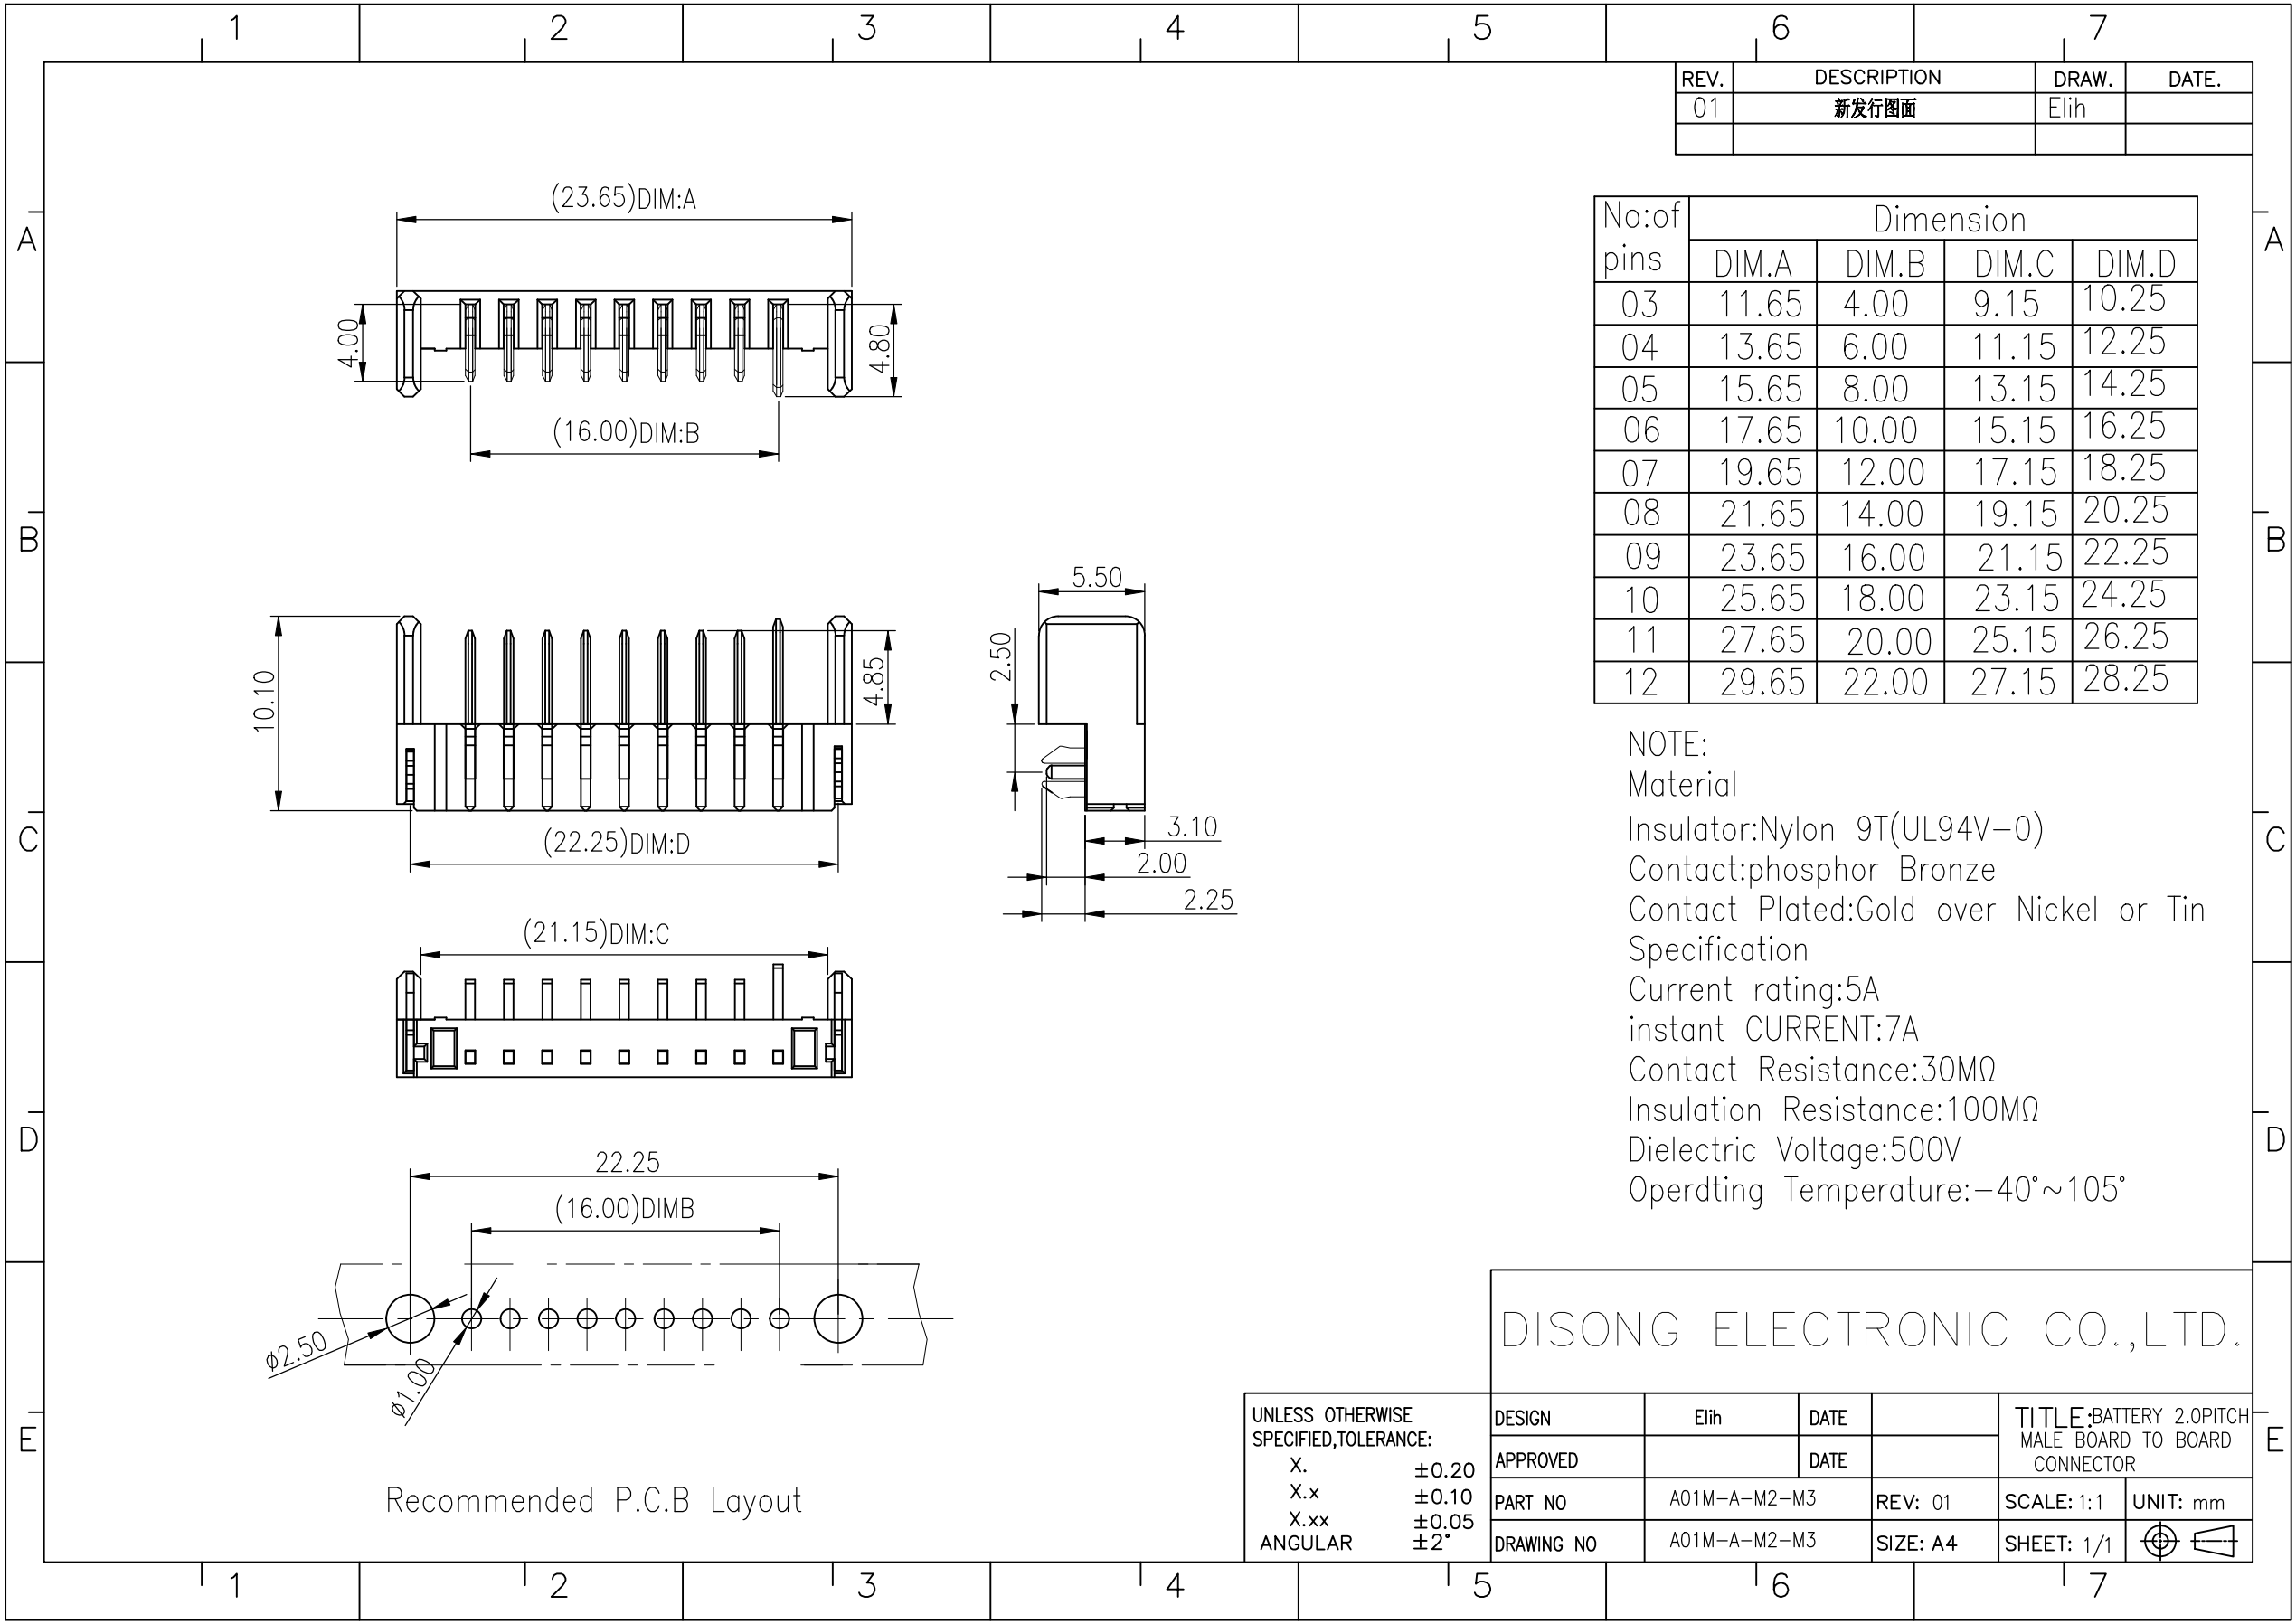

REV.	DESCRIPTION	DRAW.	DATE.
01	新发行图面	Elih	

No:of pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.D
03	11.65	4.00	9.15	10.25
04	13.65	6.00	11.15	12.25
05	15.65	8.00	13.15	14.25
06	17.65	10.00	15.15	16.25
07	19.65	12.00	17.15	18.25
08	21.65	14.00	19.15	20.25
09	23.65	16.00	21.15	22.25
10	25.65	18.00	23.15	24.25
11	27.65	20.00	25.15	26.25
12	29.65	22.00	27.15	28.25

NOTE:
Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:5A
instant CURRENT:7A
Contact Resistance:30M Ω
Insulation Resistance:100M Ω
Dielectric Voltage:500V
Operdting Temperature:-40 $^{\circ}$ ~105 $^{\circ}$

DISONG ELECTRONIC CO.,LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ± 0.20 X.x ± 0.10 X.xx ± 0.05 ANGULAR $\pm 2^{\circ}$	DESIGN	Elih	DATE		TITLE:BATTERY 2.0PITCH MALE BOARD TO BOARD CONNECTOR	
	APPROVED		DATE			
	PART NO	A01M-A-M2-M3		REV: 01	SCALE: 1:1	UNIT: mm
	DRAWING NO	A01M-A-M2-M3		SIZE: A4	SHEET: 1/1	