



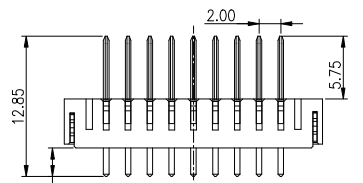


REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	Elih	

No:of pins	Dimension		
	DIM.A	DIM.B	DIM.C
03	11.65	4.00	10.25
04	13.65	6.00	12.25
05	15.65	8.00	14.25
06	17.65	10.00	16.25
07	19.65	12.00	18.25
08	21.65	14.00	20.25
09	23.65	16.00	22.25
10	25.65	18.00	24.25
11	27.65	20.00	26.25
12	29.65	22.00	28.25

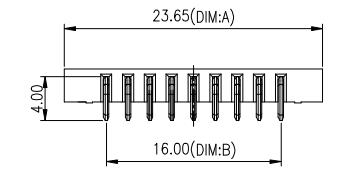

Recommended P.C.B Layout
Layout Tolerance = $\pm 0.05\text{mm}$

NOTE:
Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:5A
instant CURRENT:7A
Contact Resistance:30M Ω
Insulation Resistance:100M Ω
Dielectric Voltage:500V
Operdting Temperature:-40 $^{\circ}$ ~105 $^{\circ}$

DISONG ELECTRONIC CO.,LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ± 0.20 X.x ± 0.15 X.xx ± 0.10 ANGULAR $\pm 2'$	DESIGN	Elih	DATE		TITLE: Battery 180° 2.0mm Pitches Male Connector
	APPROVED		DATE		
	PART NO	A02M-A-M5	REV: 01	SCALE: 1:1	UNIT: mm
	DRAWING NO	A02M-A-M5	SIZE: A4	SHEET: 1/1	