






REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	Eli	2016.05.05

No. of Pins	Dimension	
	DIM.B	DIM.A
03	5.00	9.50
04	7.50	12.00
05	10.00	14.50
06	12.50	17.00
07	15.00	19.50
08	17.50	22.00
09	20.00	24.50
10	22.50	27.00
11	25.00	29.50

Material
 Insulator:Nylon 9T(UL94V-0)
 TERMINAL:phosphor Bronze
 TERMINAL:Plated Gold over Nickel or Tin
 Specification
 Current rating:7A
 instant CURRENT:10A
 Contact Resistance:30MΩ
 Insulation Resistance:100MΩ
 Dielectric Voltage:500V
 Operdting Temperature:-40°~105°

DISONG ELECTRONIC CO.,LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ±0.50 X.x ±0.30 X.xx ±0.20 ANGULAR ±2°	DESIGN		DATE		TITLE: Battery 90° 2.5mm Pitches Male Connector	
	APPROVED		DATE			
	PART NO	B01M-A-R4		REV: 01	SCALE: 1:1	UNIT: mm
	DRAWING NO	B01M-A-R4		SIZE: A4	SHEET: 1/1	

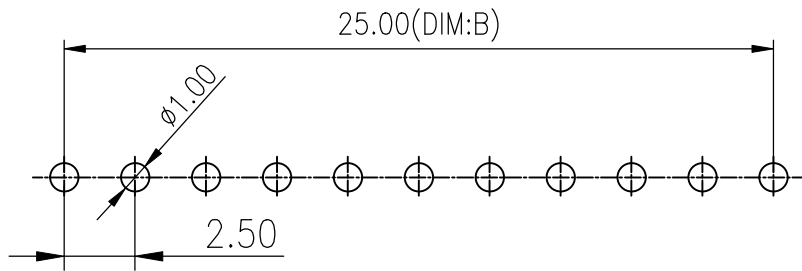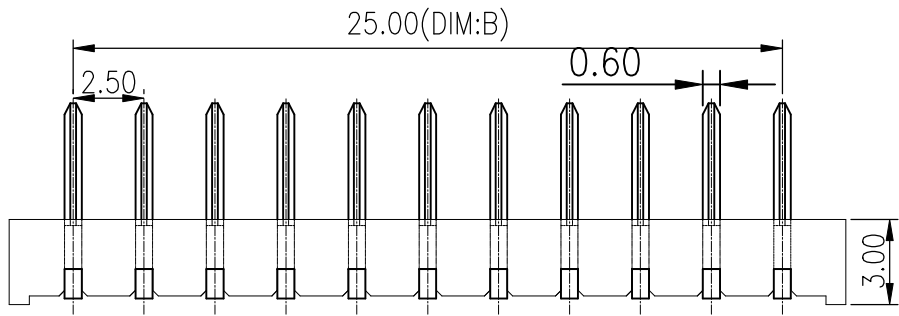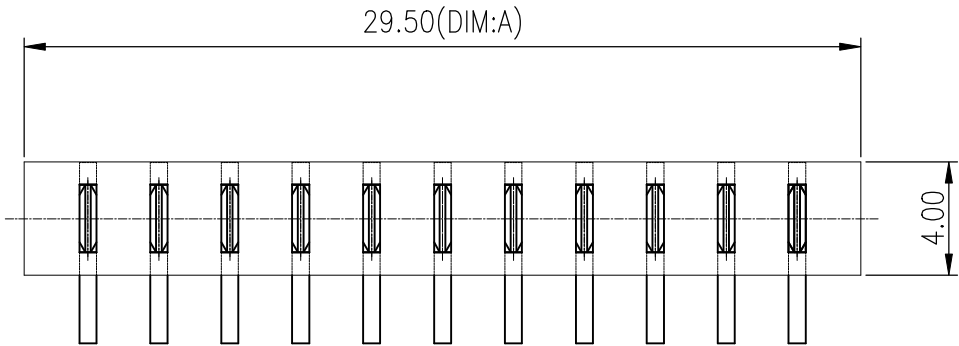

Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm