


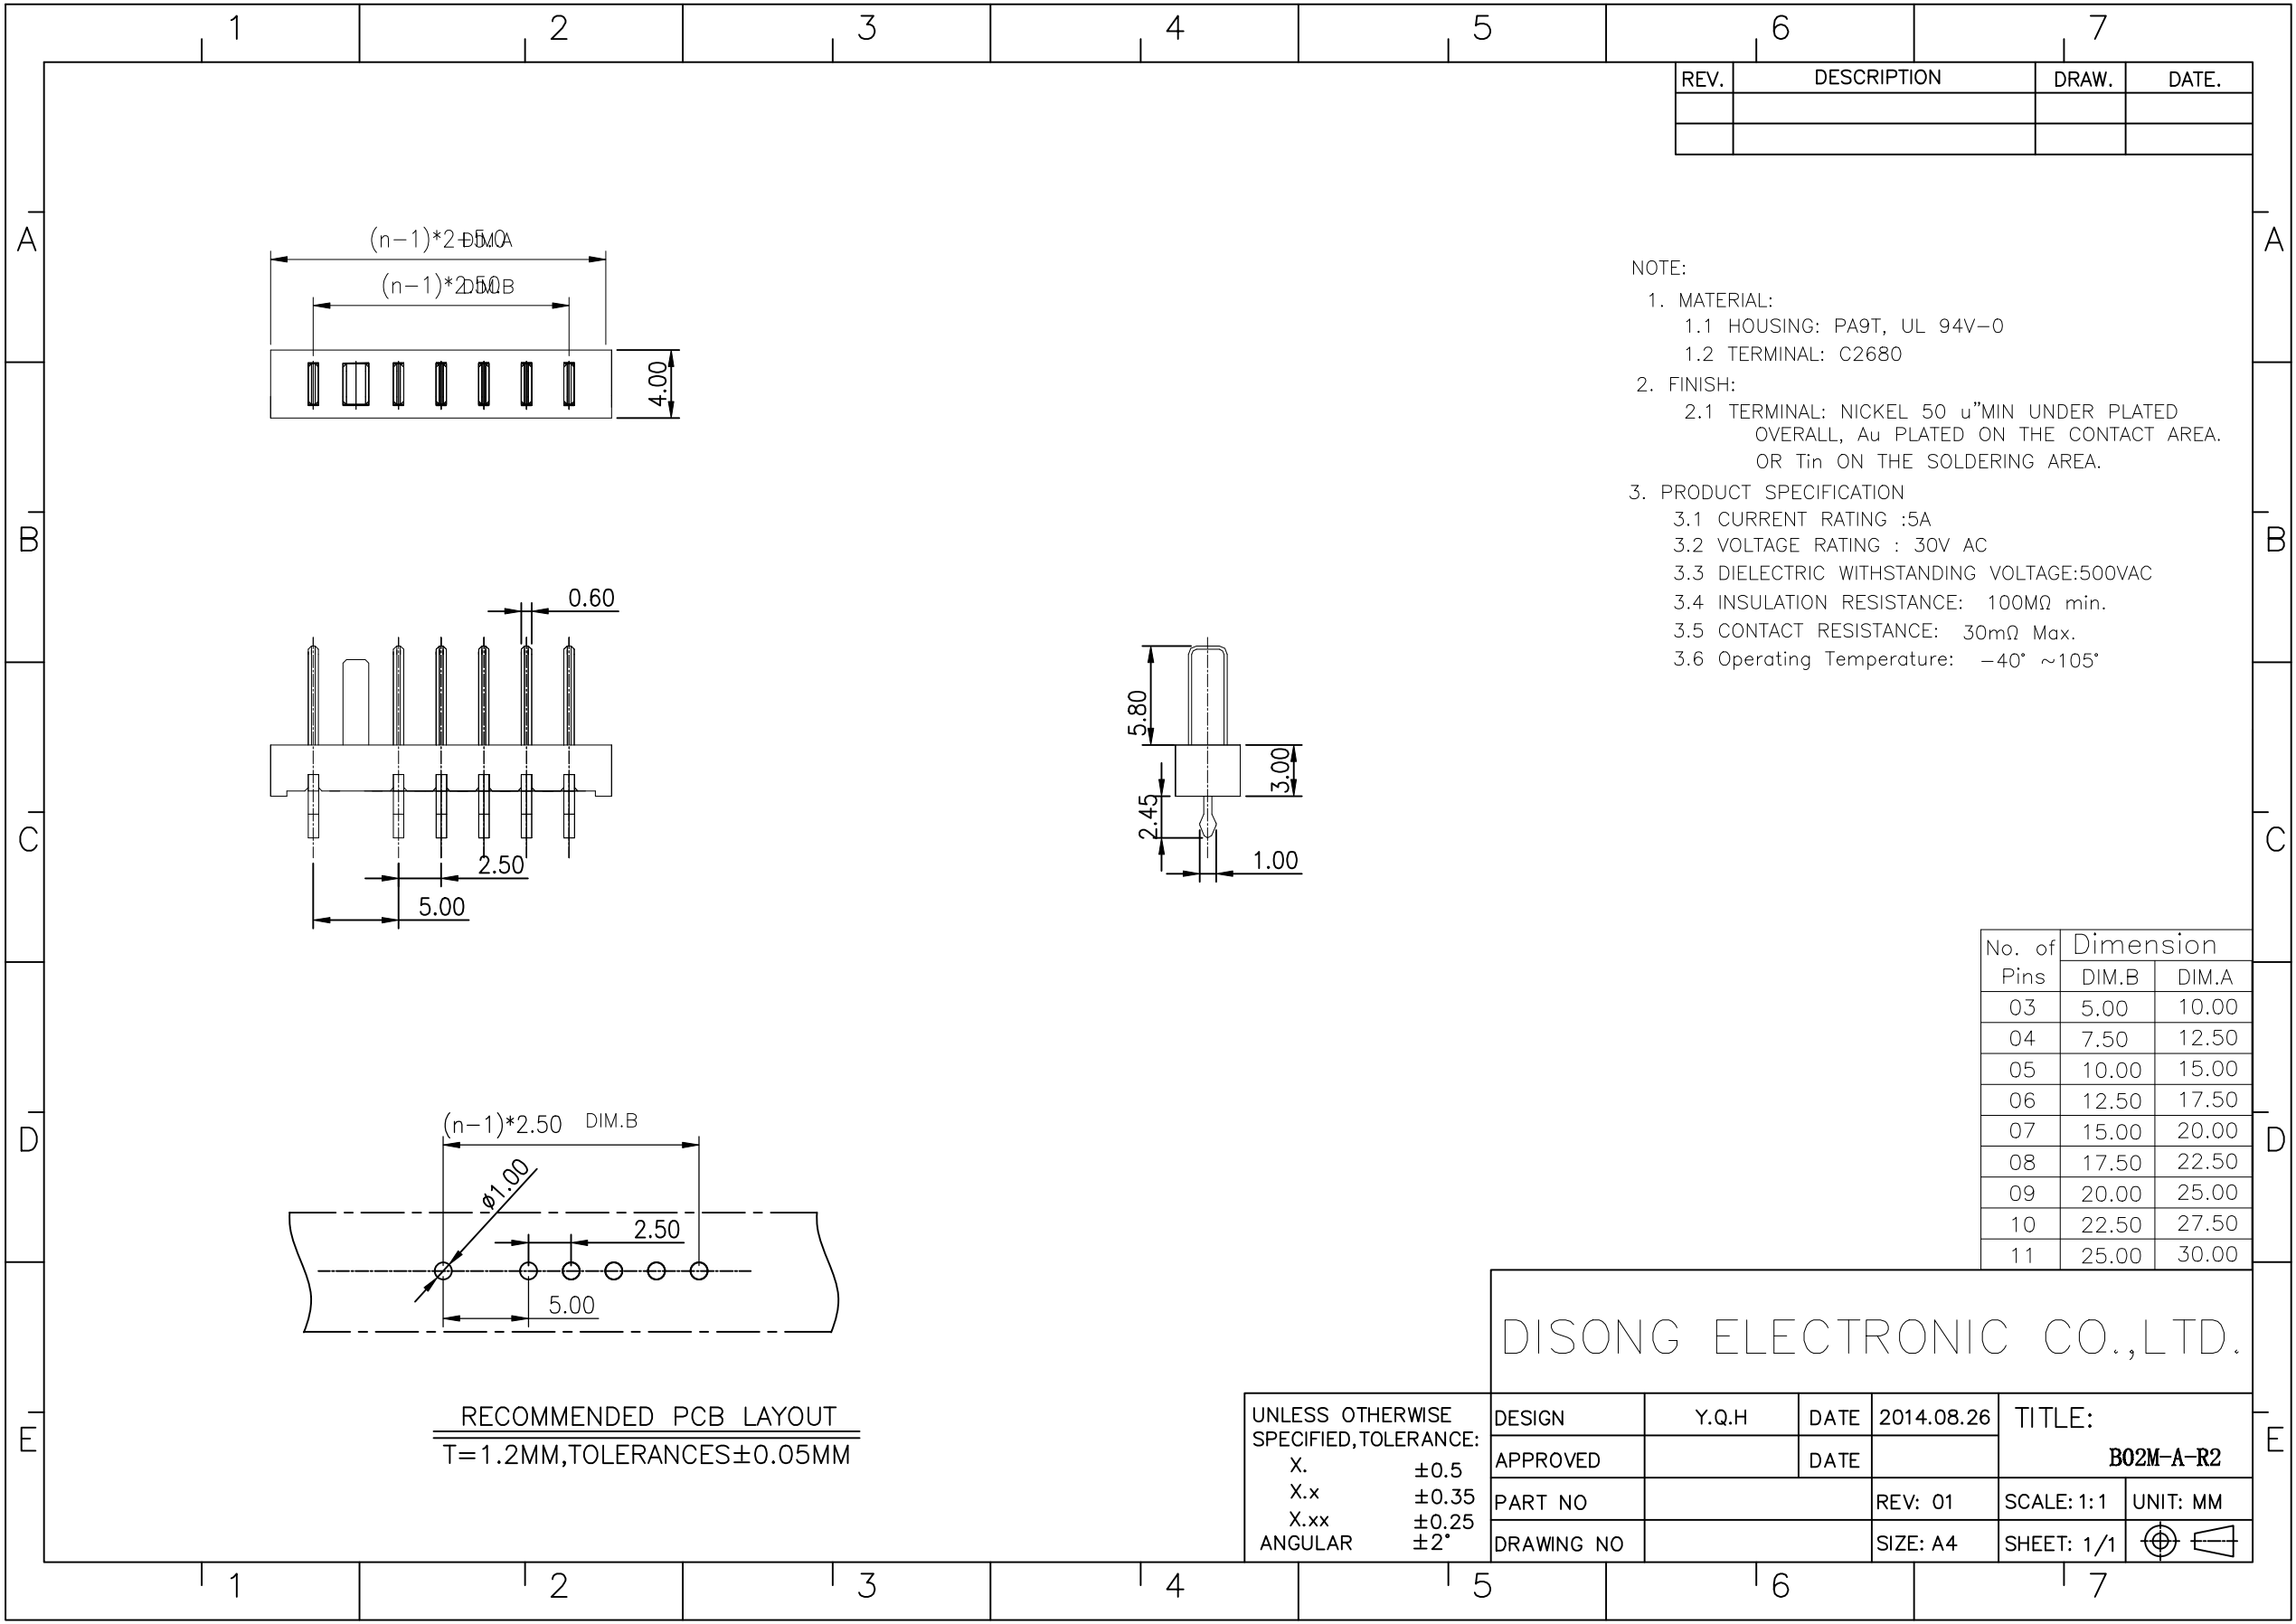

REV.	DESCRIPTION	DRAW.	DATE.

- NOTE:
- 1. MATERIAL:
 - 1.1 HOUSING: PA9T, UL 94V-0
 - 1.2 TERMINAL: C2680
 - 2. FINISH:
 - 2.1 TERMINAL: NICKEL 50 μ MIN UNDER PLATED OVERALL, Au PLATED ON THE CONTACT AREA. OR Tin ON THE SOLDERING AREA.
 - 3. PRODUCT SPECIFICATION
 - 3.1 CURRENT RATING :5A
 - 3.2 VOLTAGE RATING : 30V AC
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE:500VAC
 - 3.4 INSULATION RESISTANCE: 100M Ω min.
 - 3.5 CONTACT RESISTANCE: 30m Ω Max.
 - 3.6 Operating Temperature: -40° ~105°

No. of Pins	Dimension	
	DIM.B	DIM.A
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00

DISONG ELECTRONIC CO.,LTD.

RECOMMENDED PCB LAYOUT
T=1.2MM,TOLERANCES $\pm$ 0.05MM

UNLESS OTHERWISE SPECIFIED,TOLERANCE:
X. $\pm$ 0.5
X.x $\pm$ 0.35
X.xx $\pm$ 0.25
ANGULAR $\pm$ 2°

DESIGN	Y.Q.H	DATE	2014.08.26	TITLE: B02M-A-R2	
APPROVED		DATE			
PART NO			REV: 01	SCALE: 1:1	UNIT: MM
DRAWING NO			SIZE: A4	SHEET: 1/1	