


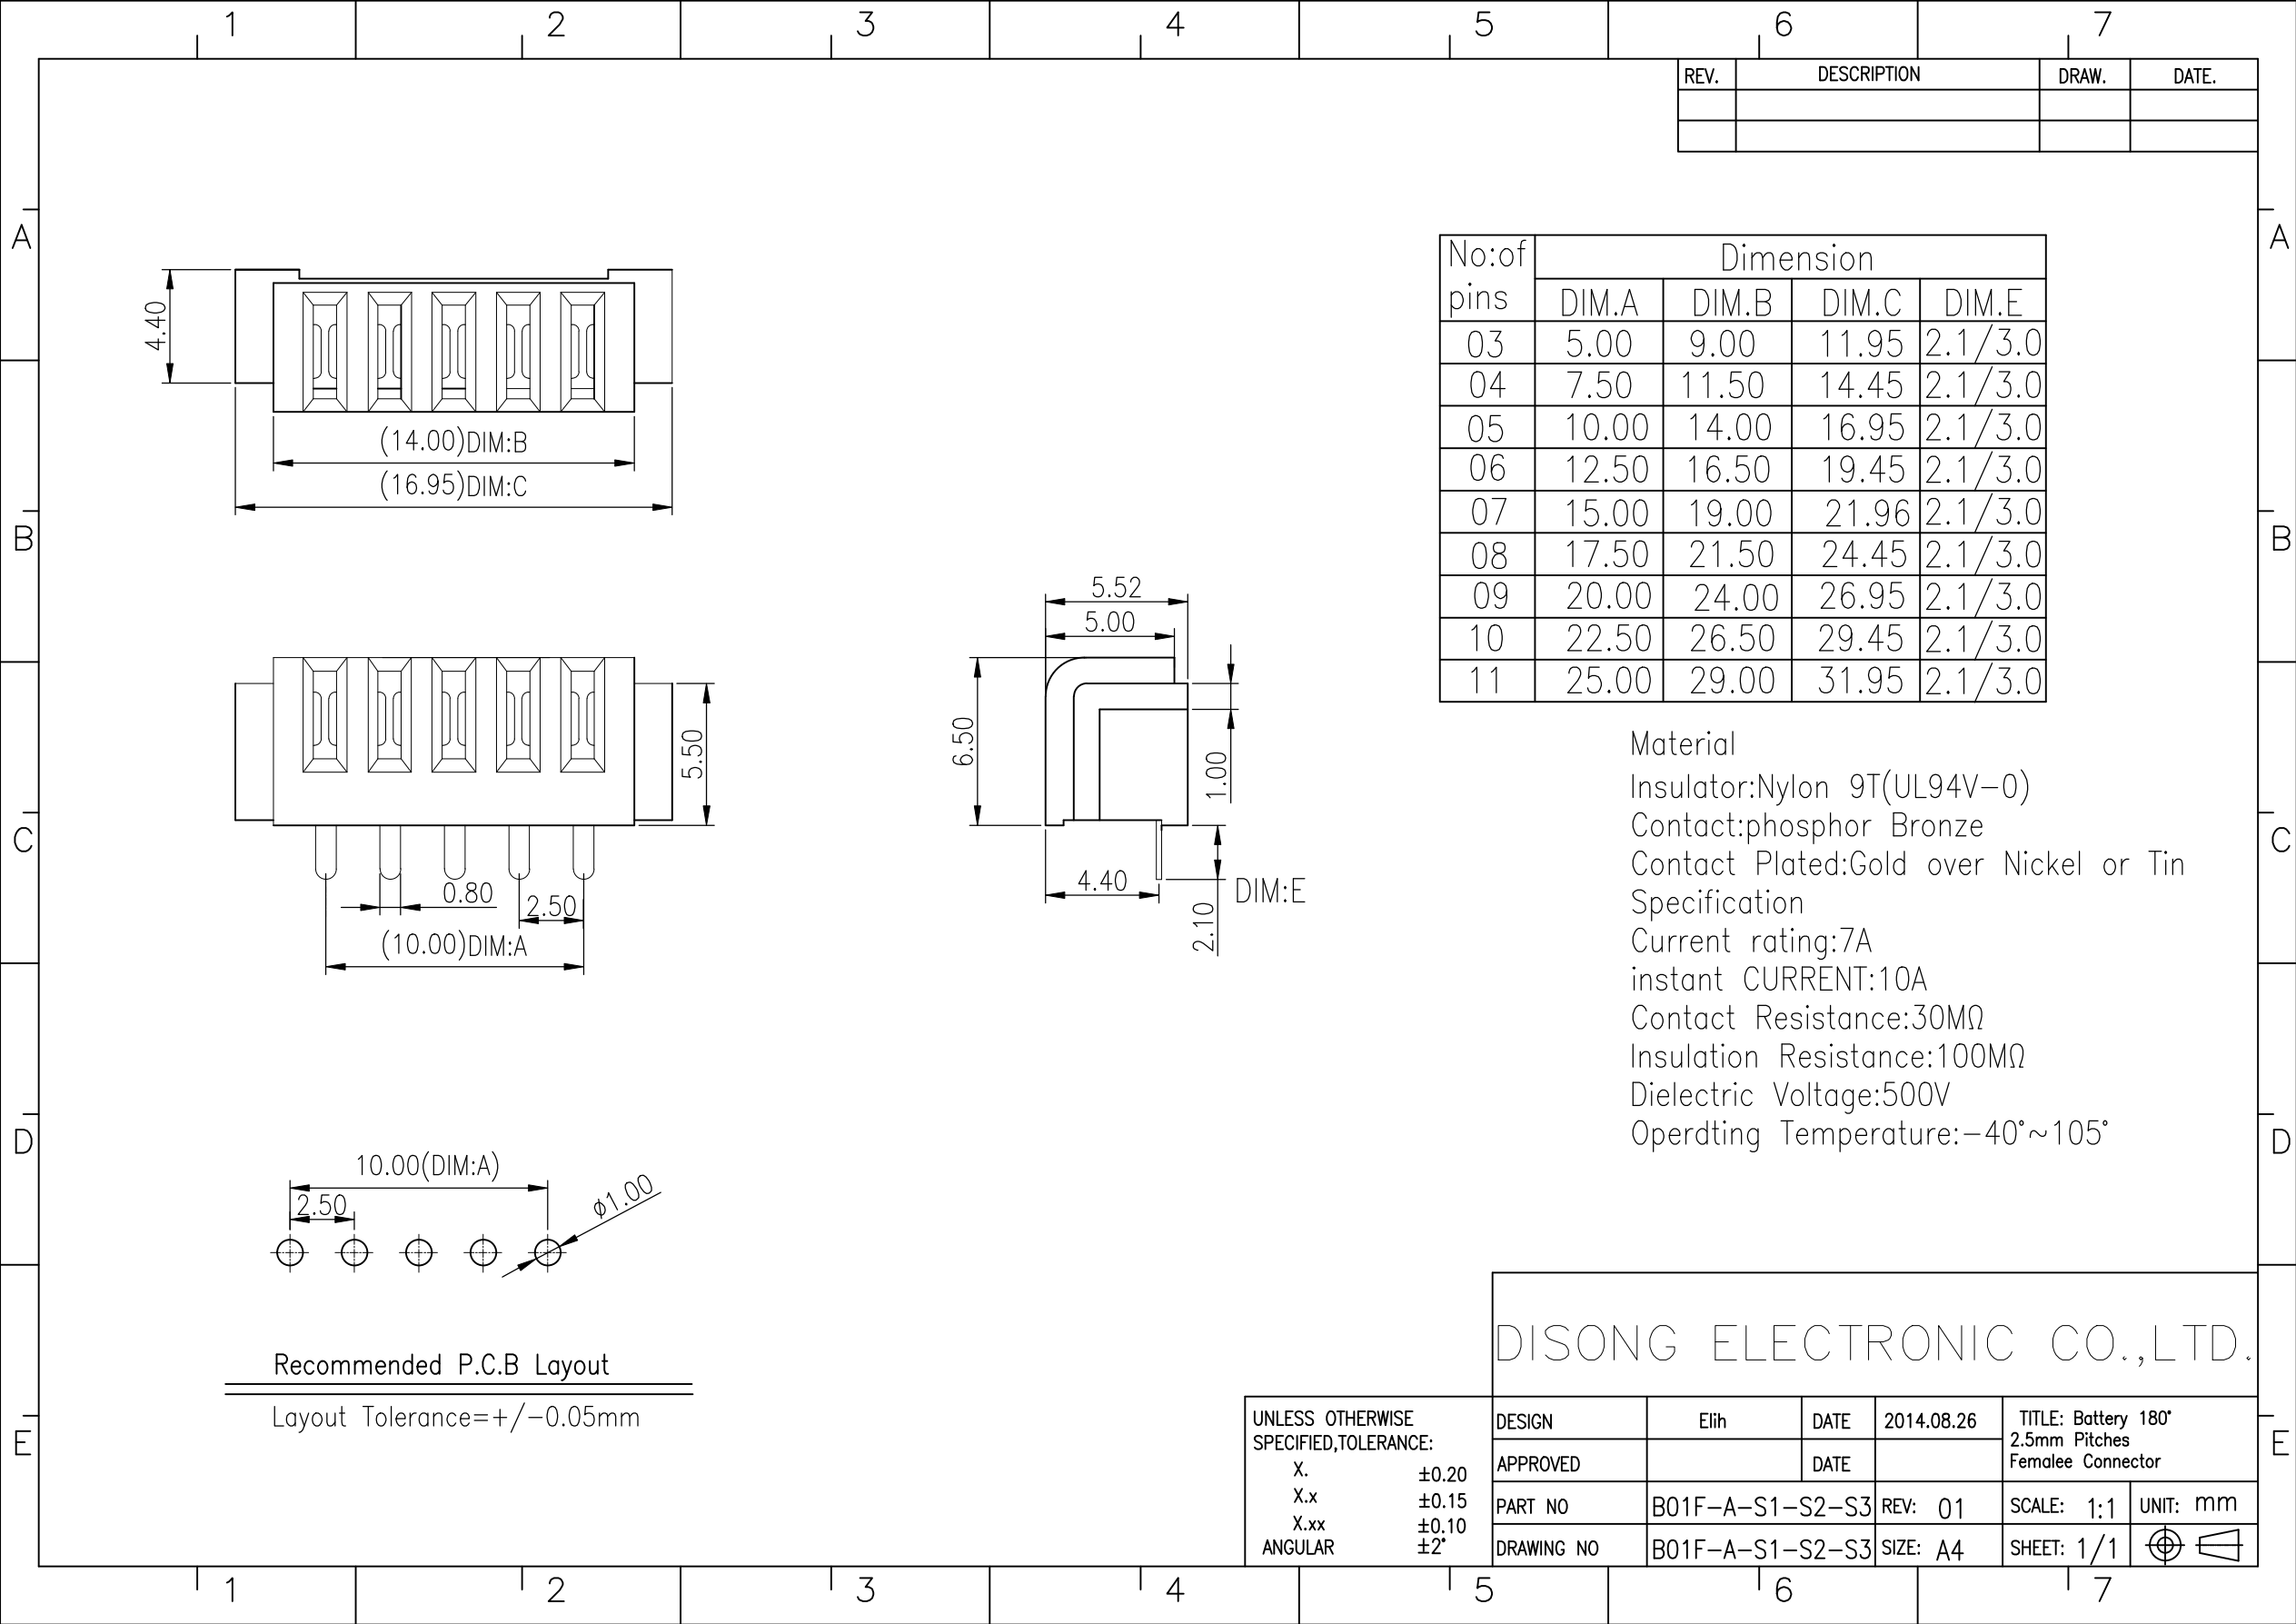

REV.	DESCRIPTION	DRAW.	DATE.

No:of pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.E
03	5.00	9.00	11.95	2.1/3.0
04	7.50	11.50	14.45	2.1/3.0
05	10.00	14.00	16.95	2.1/3.0
06	12.50	16.50	19.45	2.1/3.0
07	15.00	19.00	21.96	2.1/3.0
08	17.50	21.50	24.45	2.1/3.0
09	20.00	24.00	26.95	2.1/3.0
10	22.50	26.50	29.45	2.1/3.0
11	25.00	29.00	31.95	2.1/3.0

Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:7A
instant CURRENT:10A
Contact Resistance:30MΩ
Insulation Resistance:100MΩ
Dielectric Voltage:500V
Operdting Temperature:-40°~105°

DISONG ELECTRONIC CO.,LTD.					
DESIGN	Elii	DATE	2014.08.26	TITLE: Battery 180° 2.5mm Pitches Female Connector	
APPROVED		DATE			
PART NO	B01F-A-S1-S2-S3	REV: 01	SCALE: 1:1	UNIT: mm	
DRAWING NO	B01F-A-S1-S2-S3	SIZE: A4	SHEET: 1/1		

UNLESS OTHERWISE SPECIFIED,TOLERANCE:	
X.	±0.20
X.x	±0.15
X.xx	±0.10
ANGULAR	±2°