


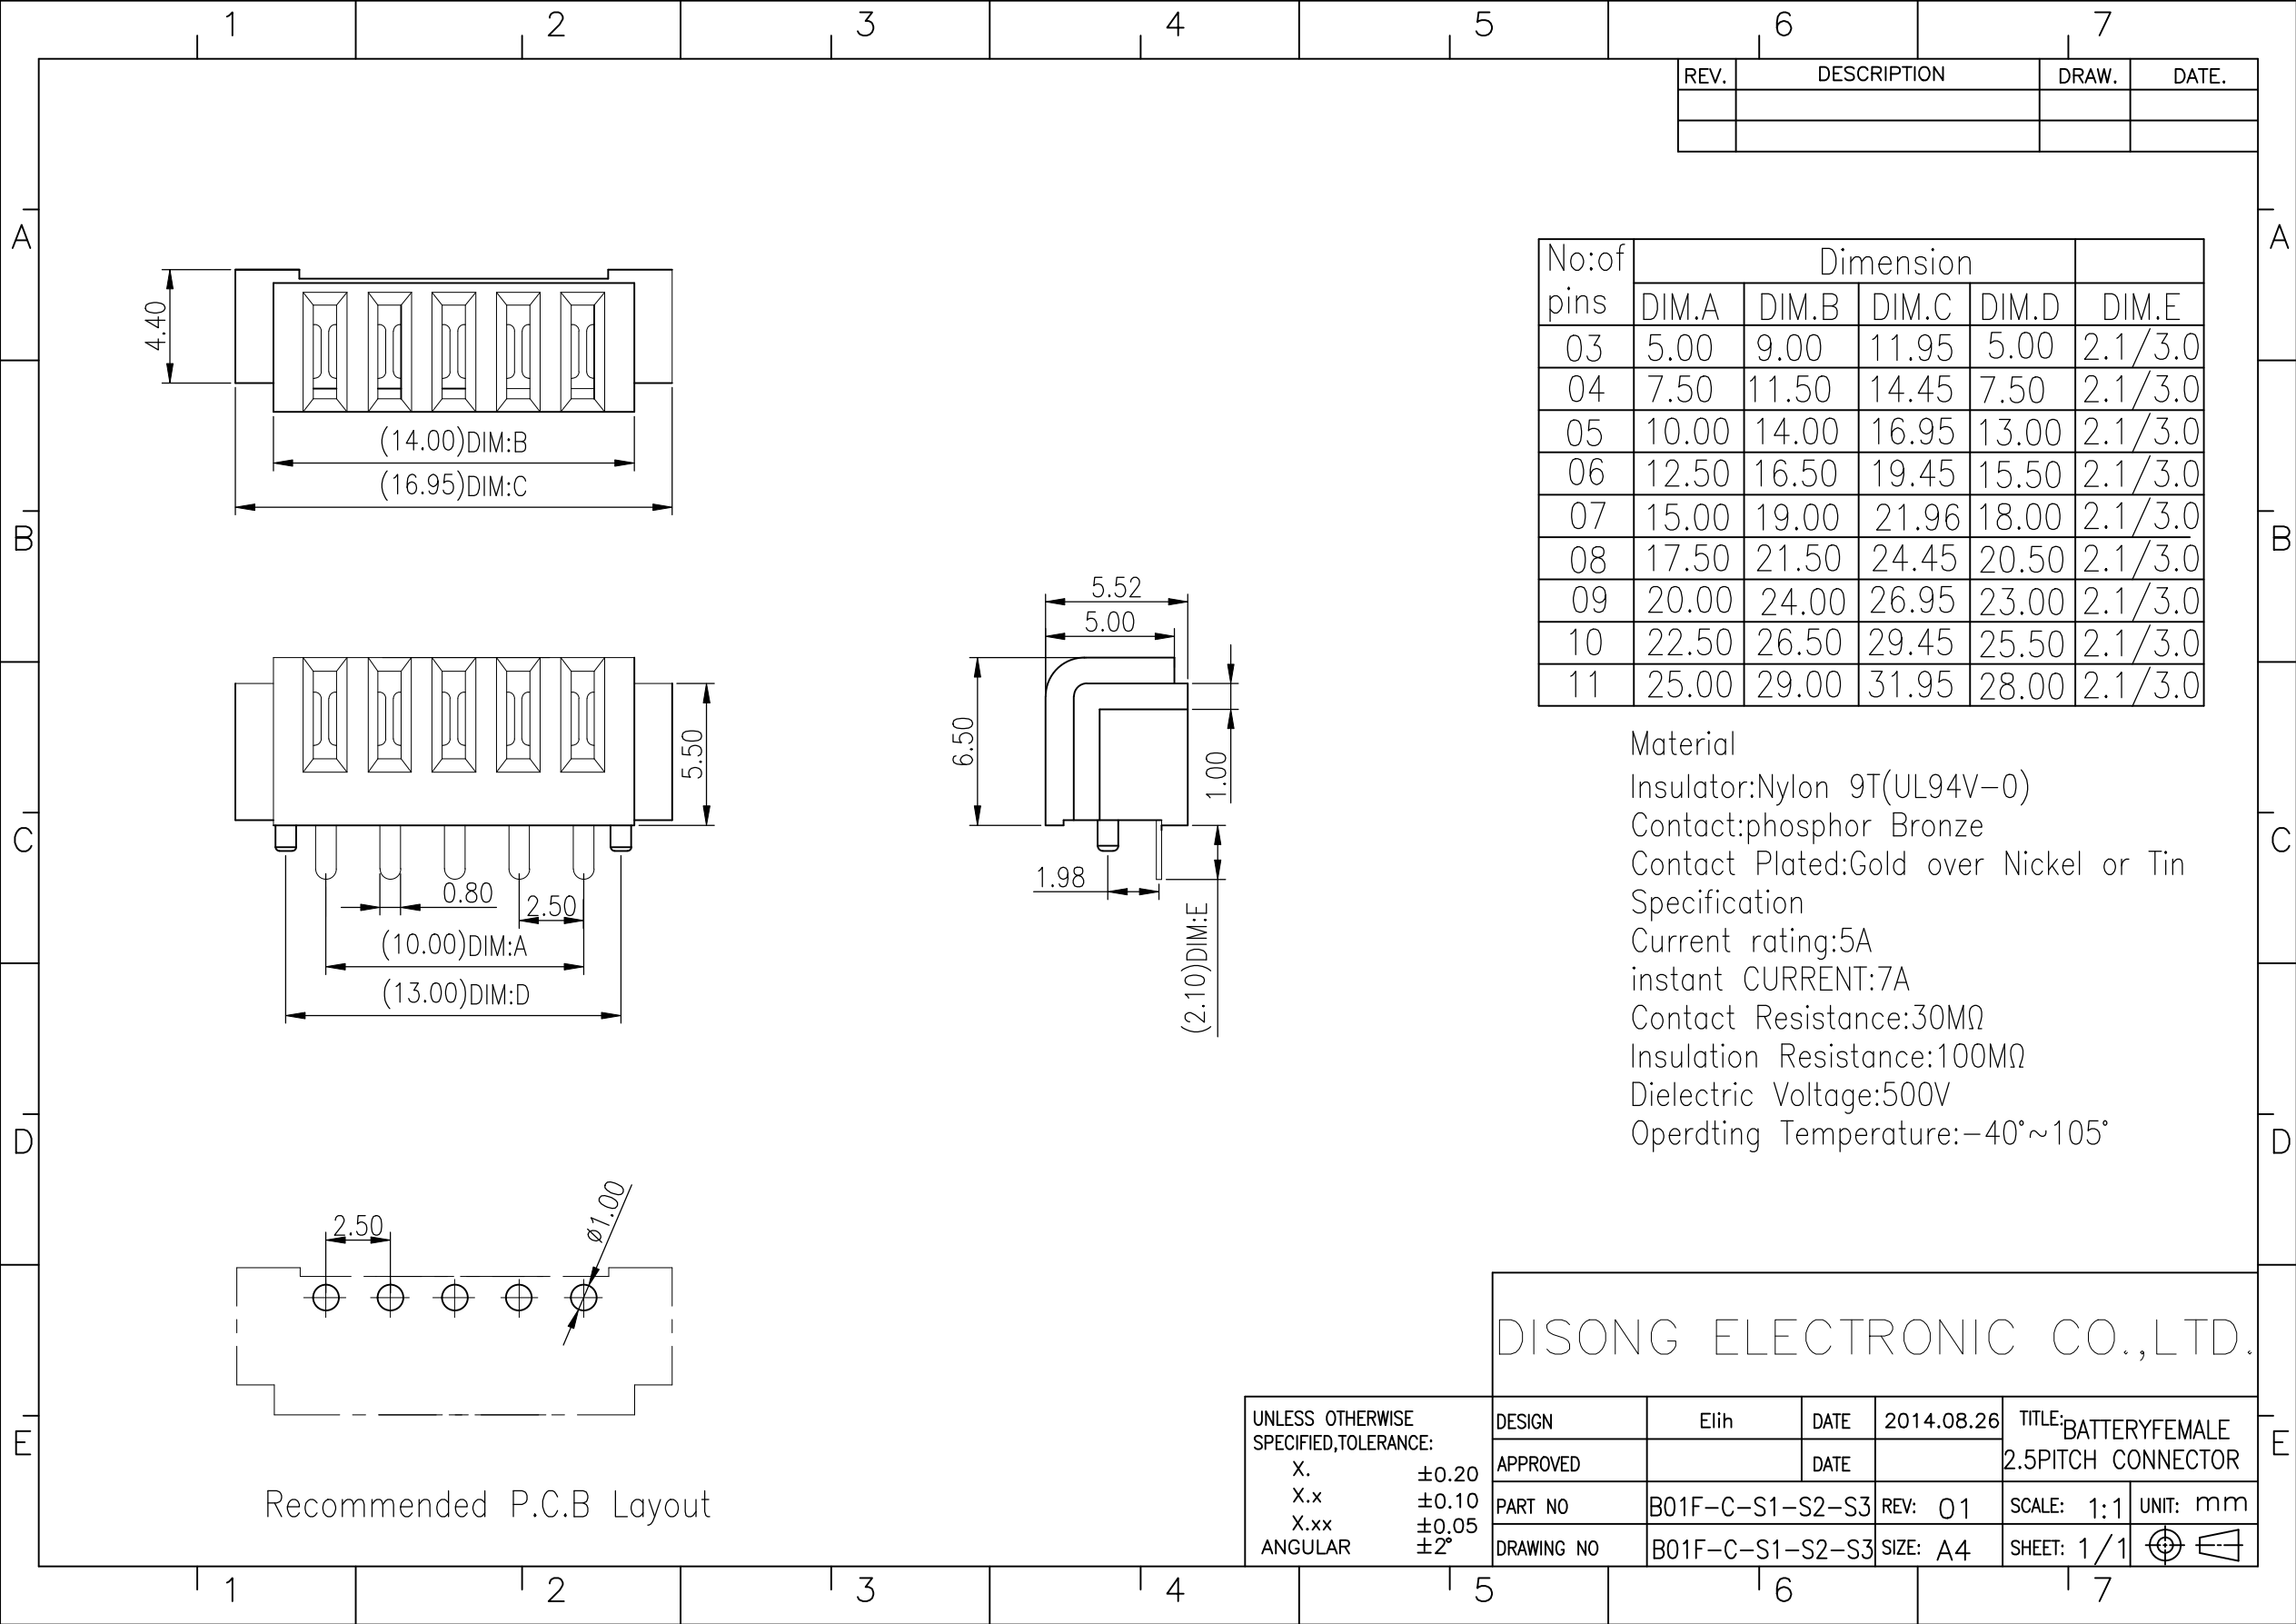

REV.	DESCRIPTION	DRAW.	DATE.

No:of pins	Dimension				
	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
03	5.00	9.00	11.95	5.00	2.1/3.0
04	7.50	11.50	14.45	7.50	2.1/3.0
05	10.00	14.00	16.95	13.00	2.1/3.0
06	12.50	16.50	19.45	15.50	2.1/3.0
07	15.00	19.00	21.96	18.00	2.1/3.0
08	17.50	21.50	24.45	20.50	2.1/3.0
09	20.00	24.00	26.95	23.00	2.1/3.0
10	22.50	26.50	29.45	25.50	2.1/3.0
11	25.00	29.00	31.95	28.00	2.1/3.0

Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:5A
instant CURRENT:7A
Contact Resistance:30M Ω
Insulation Resistance:100M Ω
Dielectric Voltage:500V
Operdting Temperature:-40 $^{\circ}$ ~105 $^{\circ}$

DISONG ELECTRONIC CO.,LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ± 0.20 X.x ± 0.10 X.xx ± 0.05 ANGULAR $\pm 2^{\circ}$	DESIGN	Elih	DATE	2014.08.26	TITLE: BATTERYFEMALE 2.5PITCH CONNECTOR	
	APPROVED		DATE			
	PART NO	B01F-C-S1-S2-S3	REV:	01	SCALE: 1:1	UNIT: mm
	DRAWING NO	B01F-C-S1-S2-S3	SIZE: A4	SHEET: 1/1		