


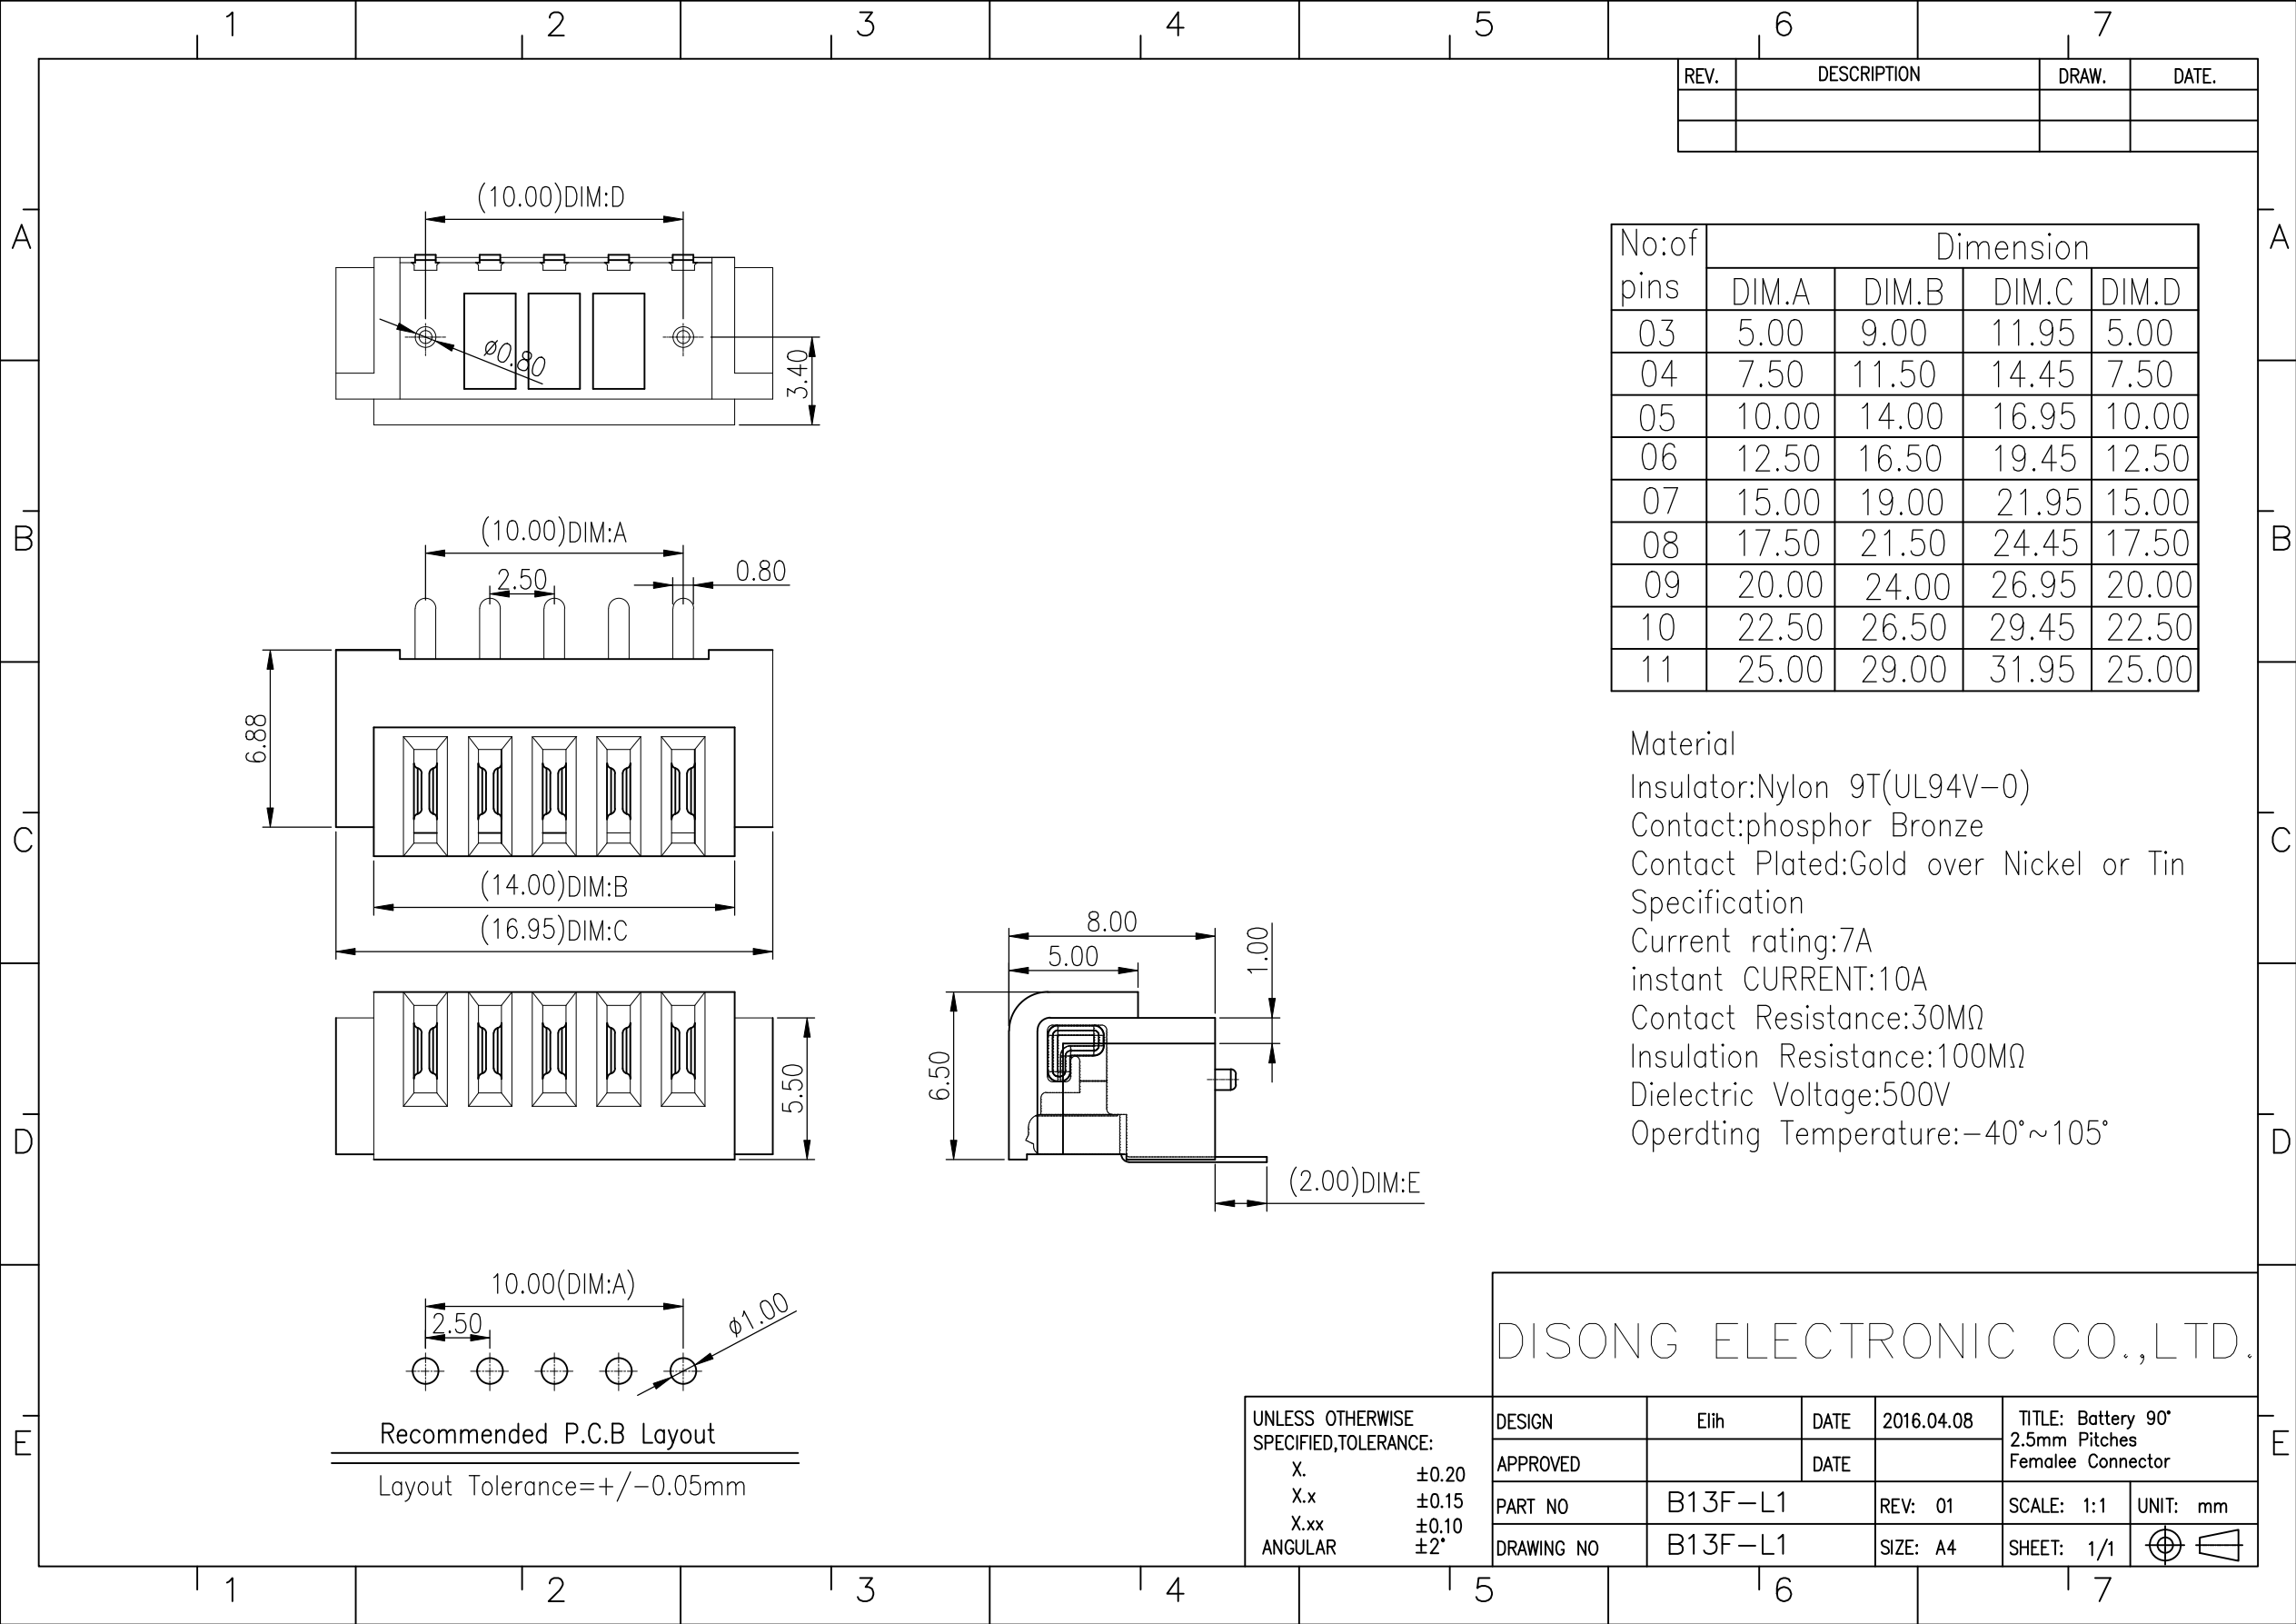

REV.	DESCRIPTION	DRAW.	DATE.

No:of pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.D
03	5.00	9.00	11.95	5.00
04	7.50	11.50	14.45	7.50
05	10.00	14.00	16.95	10.00
06	12.50	16.50	19.45	12.50
07	15.00	19.00	21.95	15.00
08	17.50	21.50	24.45	17.50
09	20.00	24.00	26.95	20.00
10	22.50	26.50	29.45	22.50
11	25.00	29.00	31.95	25.00

Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:7A
instant CURRENT:10A
Contact Resistance:30MΩ
Insulation Resistance:100MΩ
Dielectric Voltage:500V
Operdting Temperature:-40°~105°

DISONG ELECTRONIC CO.,LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE:	
X.	±0.20
X.x	±0.15
X.xx	±0.10
ANGULAR	±2°

DESIGN	Elth	DATE	2016.04.08	TITLE: Battery 90° 2.5mm Pitches Female Connector	
APPROVED		DATE			
PART NO	B13F-L1	REV:	01	SCALE:	1:1 UNIT: mm
DRAWING NO	B13F-L1	SIZE:	A4	SHEET:	1/1