




REV.	DESCRIPTION	DRAW.	DATE.

No:of pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.D
04	17.70	13.70	10.00	9.15
05	20.20	16.20	12.50	11.65
06	22.70	18.70	15.00	14.15
07	25.20	21.20	17.50	16.65
08	27.70	23.70	20.00	19.15
09	30.20	26.20	22.50	21.65
10	32.70	28.70	25.00	24.15

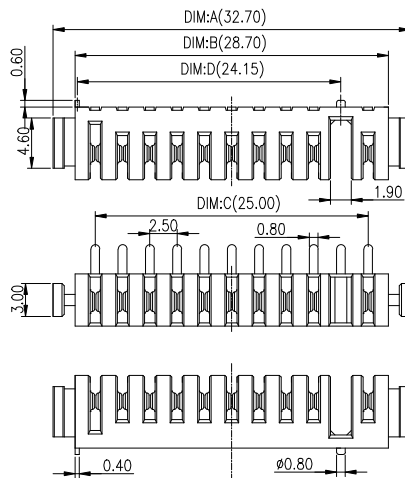

Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

Material
 Insulator:Nylon 9T(UL94V-0)
 Contact:phosphor Bronze
 Contact Plated:Gold over Nickel or Tin
 Specification
 Current rating:7A
 instant CURRENT:10A
 Contact Resistance:30MΩ
 Insulation Resistance:100MΩ
 Dielectric Voltage:500V
 Operdting Temperature:-40°~105°

DISONG ELECTRONIC CO.,LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ±0.20 X.x ±0.15 X.xx ±0.10 ANGULAR ±2°	DESIGN	Elih	DATE	2016.04.08	TITLE: Battery 90° 2.5mm Platches Female Connector	
	APPROVED		DATE			
	PART NO	B18F-A-L1		REV: 01	SCALE: 1:1	UNIT: mm
	DRAWING NO	B18F-A-L1		SIZE: A4	SHEET: 1/1	