




REV.	DESCRIPTION	DRAW.	DATE.

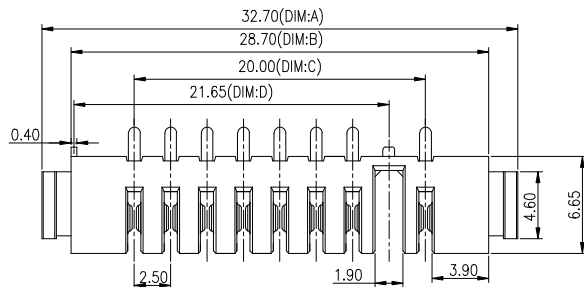

No:of pins	Dimension				
	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
04	22.70	18.70	10.00	11.65	2.0/2.9
05	25.20	21.20	12.50	14.15	2.0/2.9
06	27.70	23.70	15.00	16.65	2.0/2.9
07	30.20	26.20	17.50	19.15	2.0/2.9
08	32.70	28.70	20.00	21.65	2.0/2.9

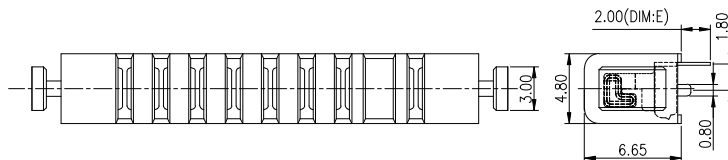

Material
 Insulator:Nylon 9T(UL94V-0)
 Contact:phosphor Bronze
 Contact Plated:Gold over Nickel or Tin
 Specification
 Current rating:5A
 instant CURRENT:7A
 Contact Resistance:30MΩ
 Insulation Resistance:100MΩ
 Dielectric Voltage:500V
 Operdting Temperature:-40°~105°

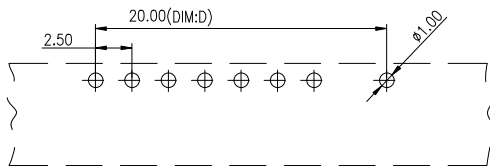

Recommended P.C.B Layout

DISONG ELECTRONIC CO.,LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ±0.20 X.x ±0.15 X.xx ±0.10 ANGULAR ±2°	DESIGN	EiH	DATE	2016.05.05	TITLE: BATTERY 2.5PITCH FEMALE BOARD TO BOARD CONNECTOR		
	APPROVED		DATE				
	PART NO	B19F-S1-S2		REV: 01	SCALE: 1:1	UNIT: mm	
	DRAWING NO	B19F-S1-S2		SIZE: A4	SHEET: 1/1		