

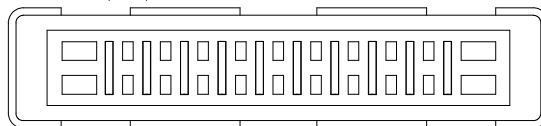

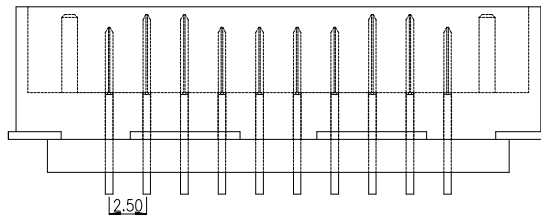


REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	Eli	2016.04.07

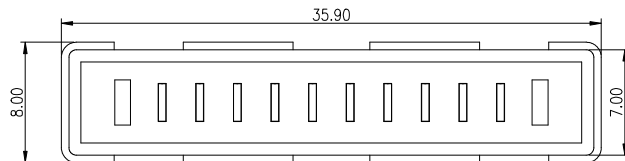

Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

Material
 Insulator:Nylon 9T(UL94V-0)
 TERMINAL:phosphor Bronze
 TERMINAL Plated:Gold over Nickel or Tin
 Specification
 Current rating:7A
 instant CURRENT:10A
 Contact Resistance:30mΩ
 Insulation Resistance:100MΩ
 Dielectric Voltage:500V
 Operdting Temperature:-40°~105°

DISONG ELECTRONIC CO.,LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ±0.50 X.x ±0.30 X.xx ±0.20 ANGULAR ±2°	DESIGN		DATE		TITLE:	BATTERY 2.5PH
	APPROVED		DATE			
	PART NO	B29M-10P-R1	REV:	01	SCALE:	1:1
	DRAWING NO	B29M-10P-R1	SIZE:		SHEET:	UNIT: mm

