


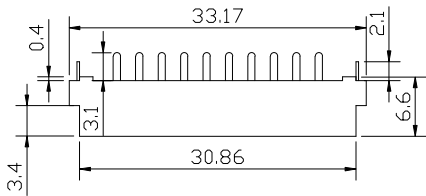
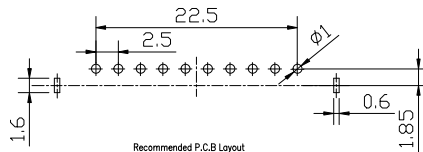


RoHS
Compliant


SYMBOL	REVISION	APPROVAL	DATE



Material
 Insulator: Nylon 9T(UL94V-0)
 TERMINAL: phosphor Bronze
 TERMINAL Plated: Gold over Nickel or Tin
 Specification
 Current rating: 7A
 instant CURRENT: 10A
 Contact Resistance: 30mΩ
 Insulation Resistance: 100MΩ
 Dielectric Voltage: 500V
 Operating Temperature: -40°~105°



Recommended P.C.B Layout
 Layout Tolerance: ±/-0.05mm



2	HOUSING	NYLON 9T	1	BLACK
1	CONTACT TERMINAL	PHOSPHOR BRONZE	9	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

东莞市迪松电子科技有限公司

PART NAME	CONNECTOR	DRAWING	Y.C.Zhang	DWG.No.	
PART NO.	B28F-10P-S2	CHECK	G.C.Chen	REV.	A1
UNIT: mm	TOLERANCE	APPROVAL	DATE	01-07-2016	
	OTHERWISE	SCALE	2:1	PAGE 1 OF 1	
UP TO 5 ±0.2	30 ±0.3	ANGLE	0°±3'		

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

F E D C B A