


**RoHS  
Compliant**

SYMBOL		REVISION		APPROVAL		DATE	

No. of Pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.D
4	19.85	17.00	6.00	11.00
5	21.85	19.00	8.00	13.00
6	23.85	21.00	10.00	15.00
7	25.85	23.00	12.00	17.00
8	27.85	25.00	14.00	19.00
9	29.85	27.00	16.00	21.00
10	31.85	29.00	18.00	23.00
11	33.85	31.00	20.00	25.00
12	33.85	33.00	22.00	27.00

**NOTE:**  
**Material**  
 Insulator: LCP  
 Contact: C2680  
 Contact Plated: Gold over Nickel or Tin  
**Specification**  
 Current rating: 10A 12V  
 Instant CURRENT: 12A  
 Contact Resistance: 30mΩ  
 Insulation Resistance: 100MΩ  
 Dielectric Voltage: 500V  
 Operating Temperature: -40° ~105°

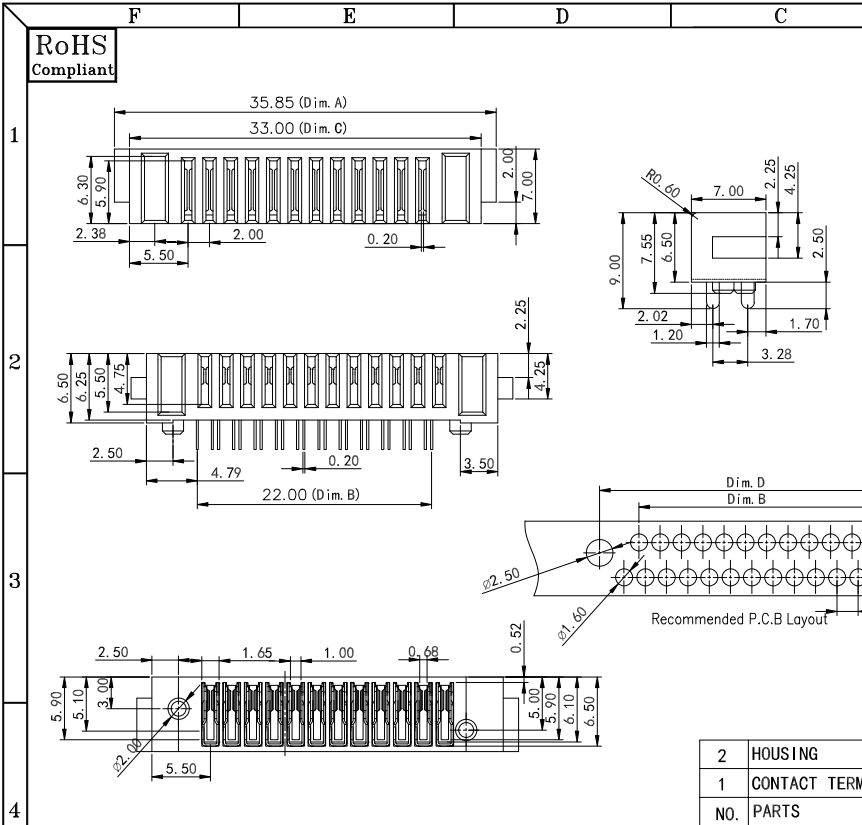

2	HOUSING	LCP	1	BLACK
1	CONTACT TERMINAL	C5210	12	Au PLATED
	NO. PARTS	MATERIAL	QTY.	FINISHING

**DISONG ELECTRONIC CO., LTD.**

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	CONNECTOR		DRAWING	M. M. Zhang	DWG. No.
PART NO.	母座DS-A05F-A-H1系列		CHECK	G. C. Chen	REV. A1
UNIT: mm	TOLERANCE	0P TO 5° ±0.2 ABOVE 5° TO 30° ±0.3 ABOVE 30° ±0.5	ANGLE	APPROVAL	DATE 20-09-2020
	OTHERWISE	0° ±0.5 ANGLE 30° ±3°	SCALE	2:1	PAGE 1 OF 1