

F

E

D

C

B

A







RoHS
Compliant

SYMBOL


REVISION

APPROVAL

DATE

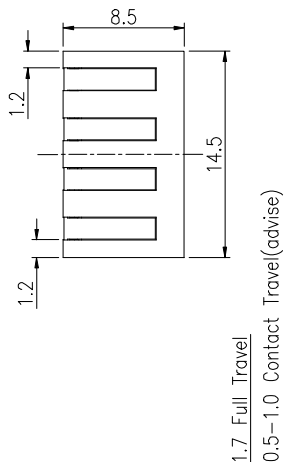

P.C.B LAYOUT



CIRCUIT

SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS:

1-1.RATING: DC 12V 3A

1-2.CONTACT RESISTANCE: 20m Ω MAX(INITAL)

1-3.DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

1-4.INSULATION RESISTANCE: 100M Ω MIN,
MEASURED BY 500V DC

2. FORCE:0.6mm CONTACT TRAVEL:400gf Max.

3. LIFE TEST:MECHANICAL LIFE TEST 20,000 CYCLES.

4. TEMPERATURE RISE : 30°C MAX

DISONG ELECTRONIC CO., LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME

CONNECTOR

DRAWING

G.C.Chen

DWG.No.

SBICL5

PART NO.

BC-1-422

CHECK

G.C.Chen

REV.

A0

UNIT :
mmTOLERANCE
OTHERWISEUP TO 5 ± 0.2
ABOVE 5 ± 0.3
ABOVE 30 ± 0.5
ANGLE $\pm 3^\circ$ ANGLE
 $0^\circ \pm 3^\circ$

APPROVAL

SCALE

DATE

08-01-2016

PAGE

1 OF 1

F

E

D

C

B

A