
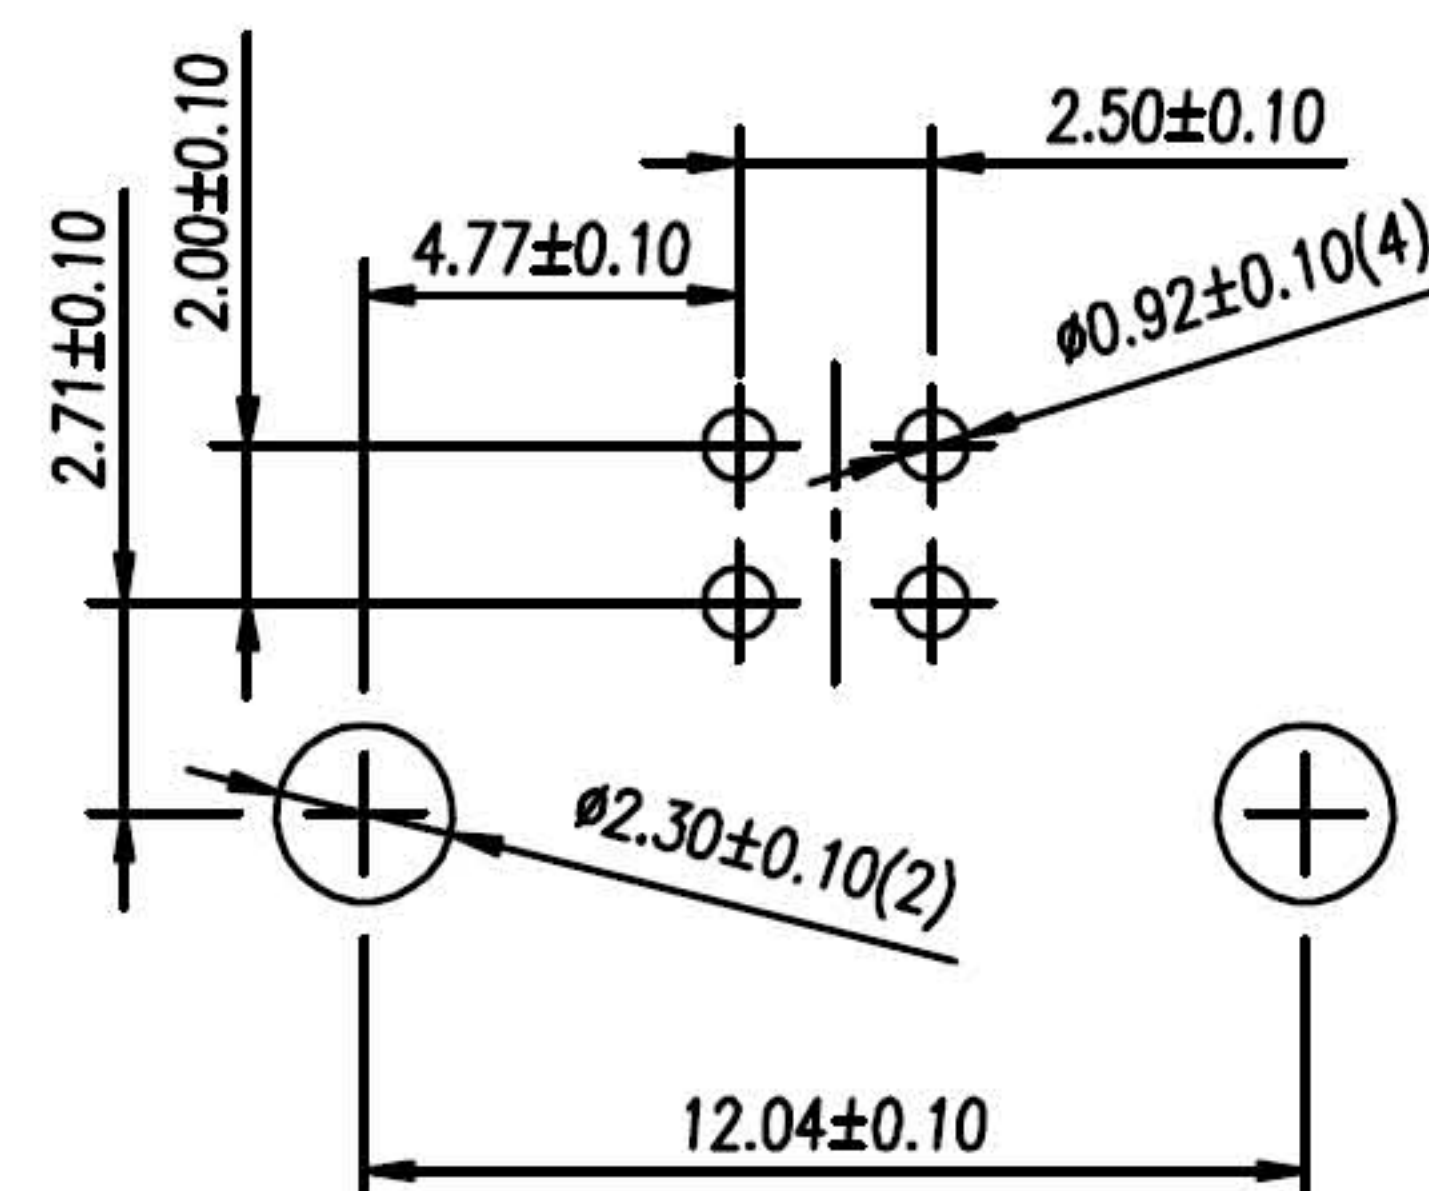
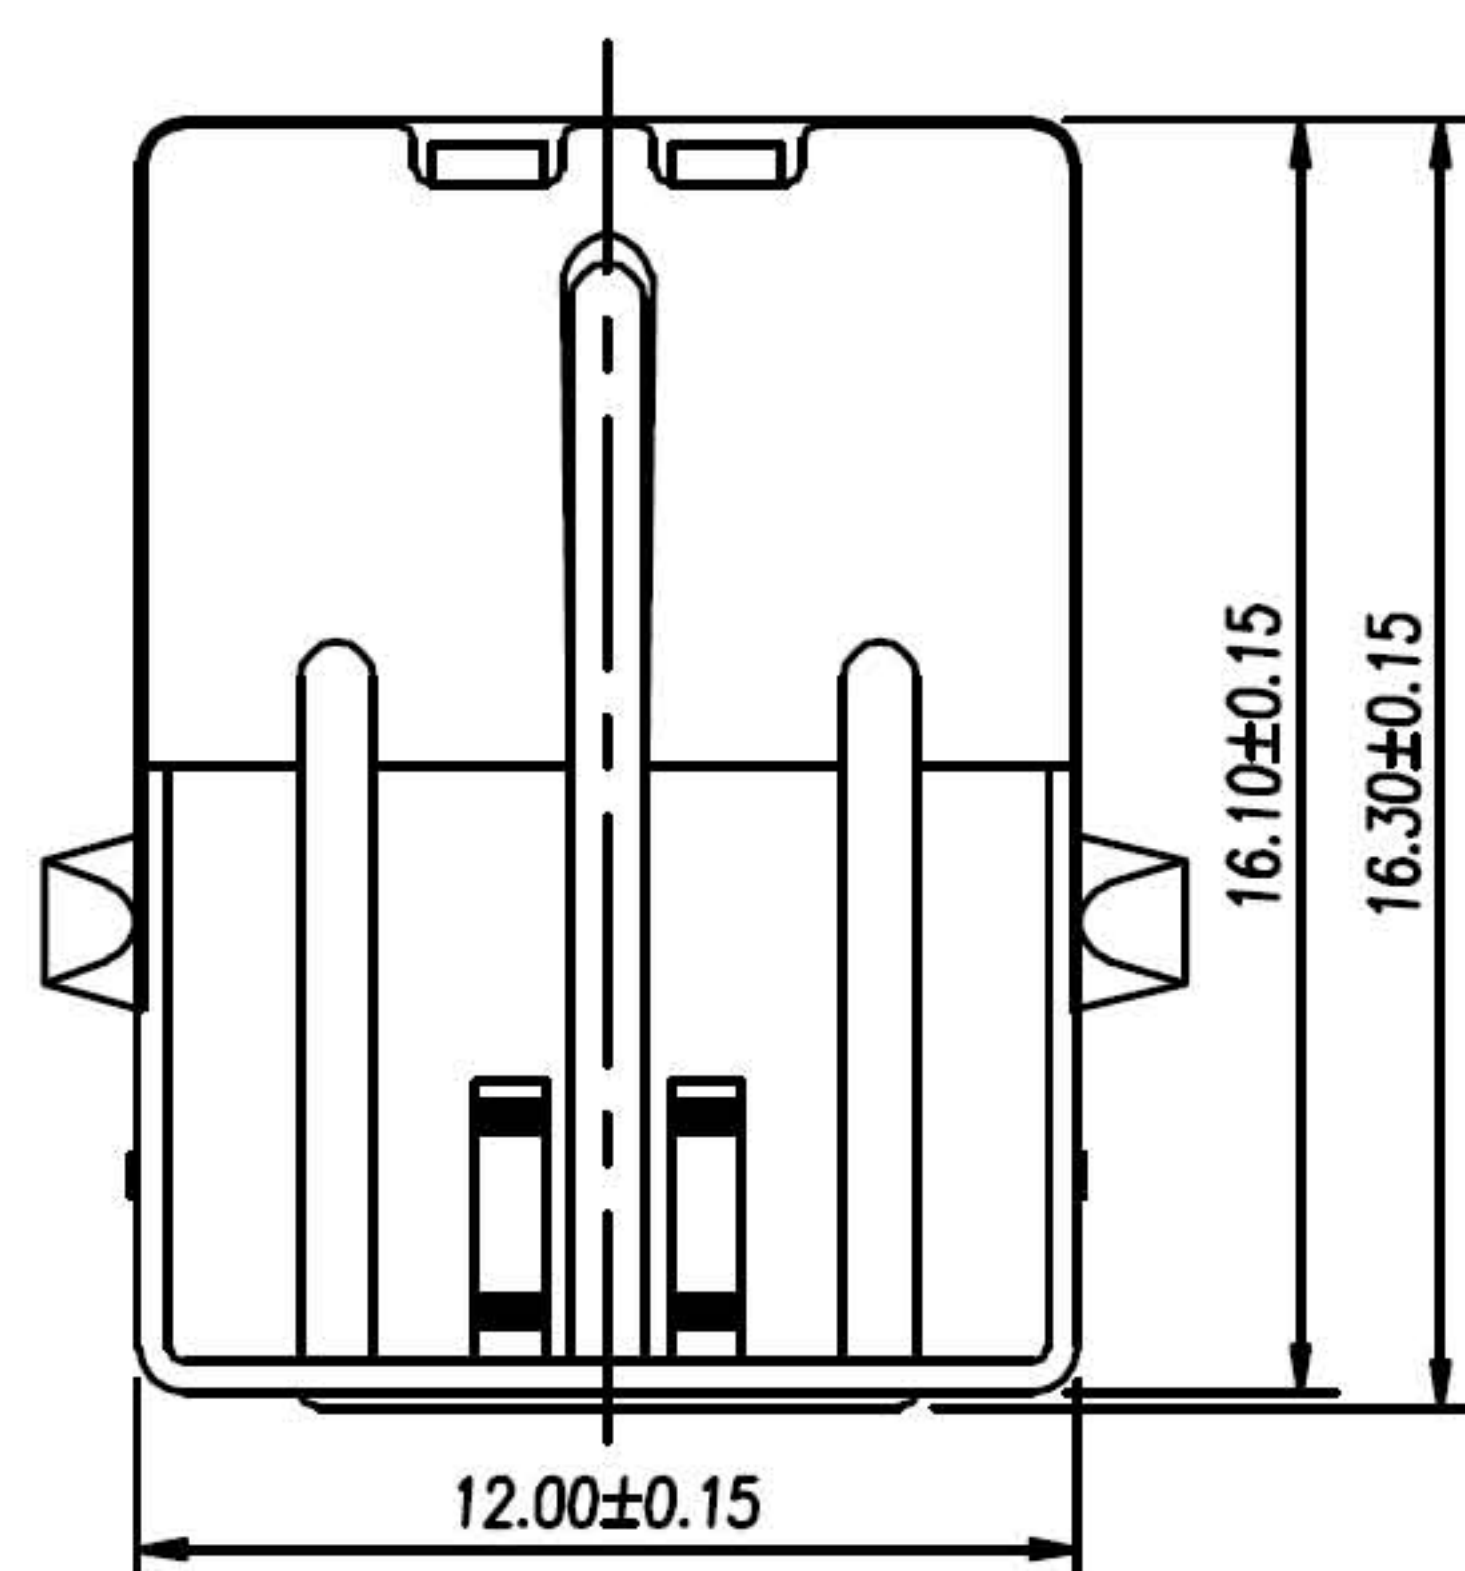
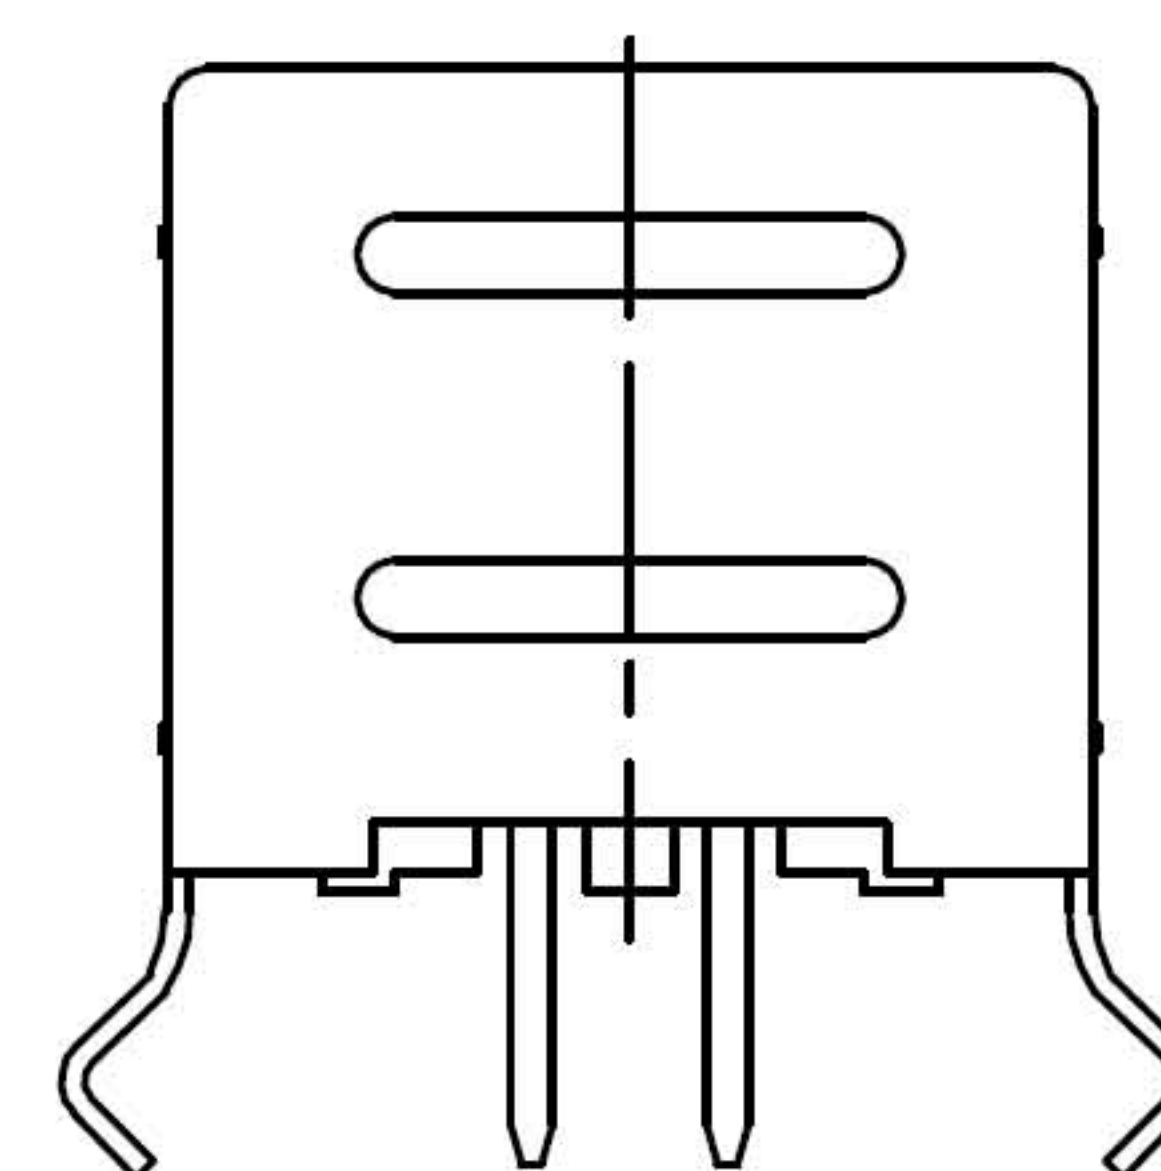
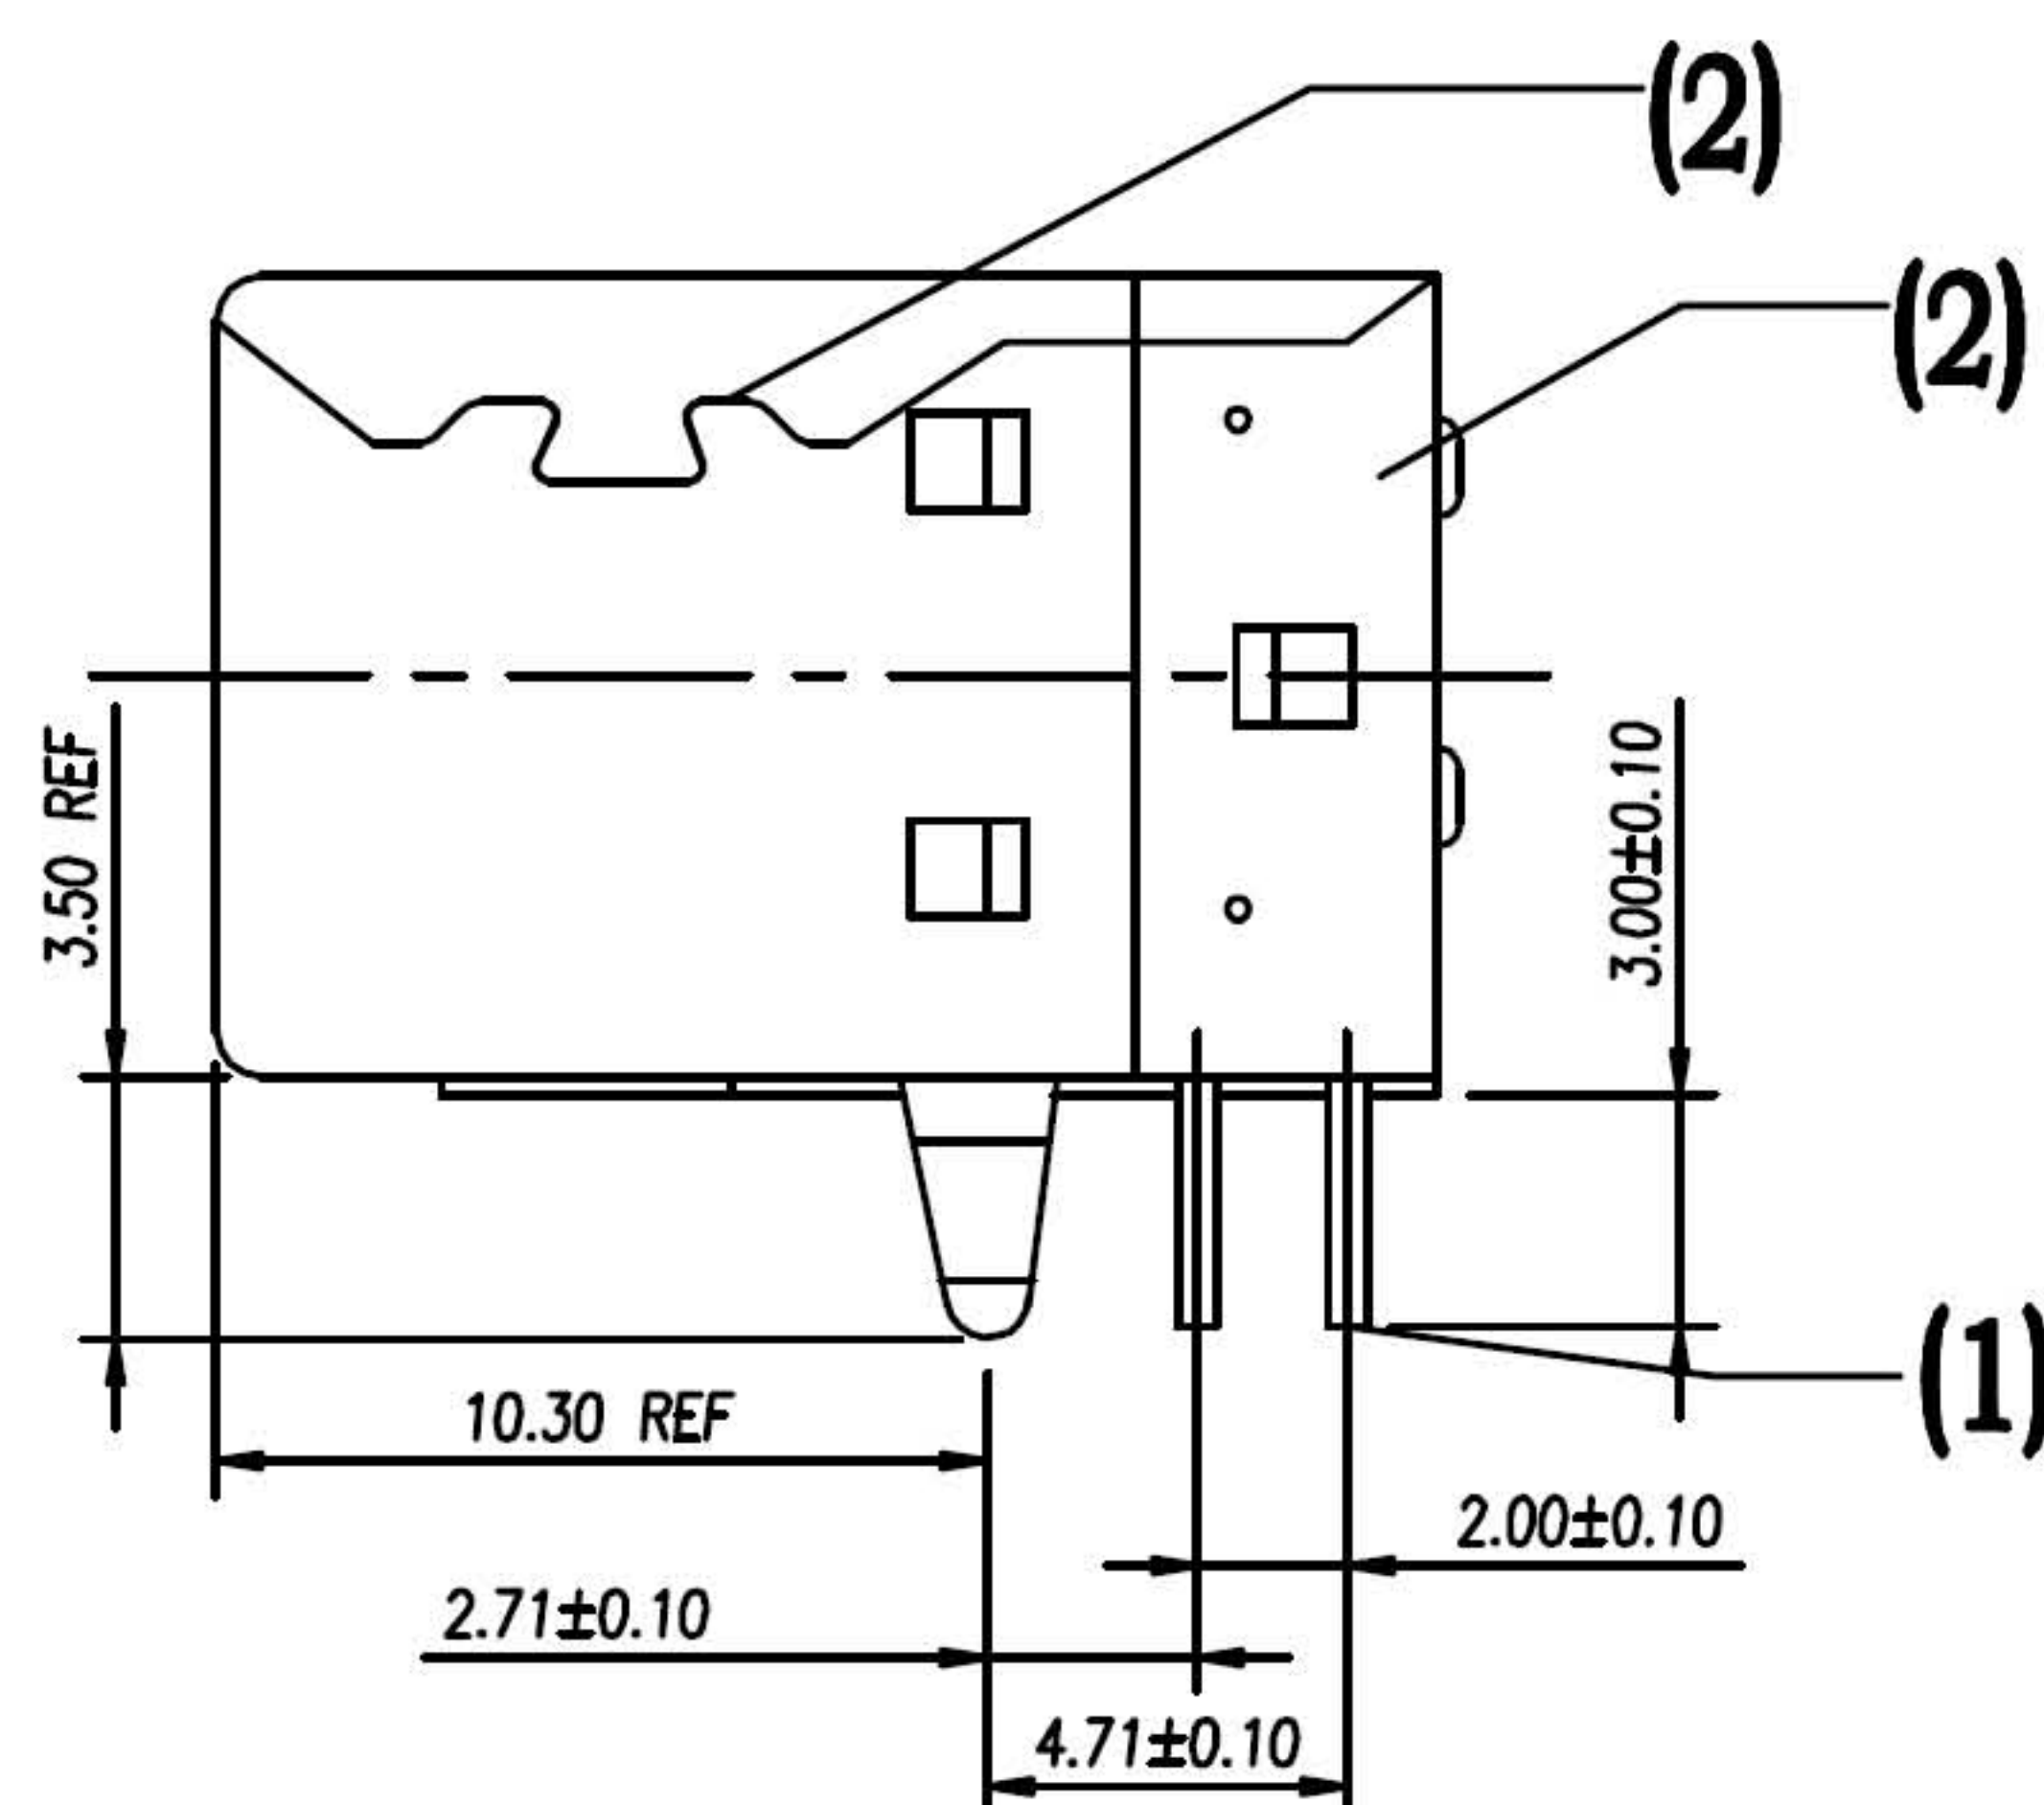


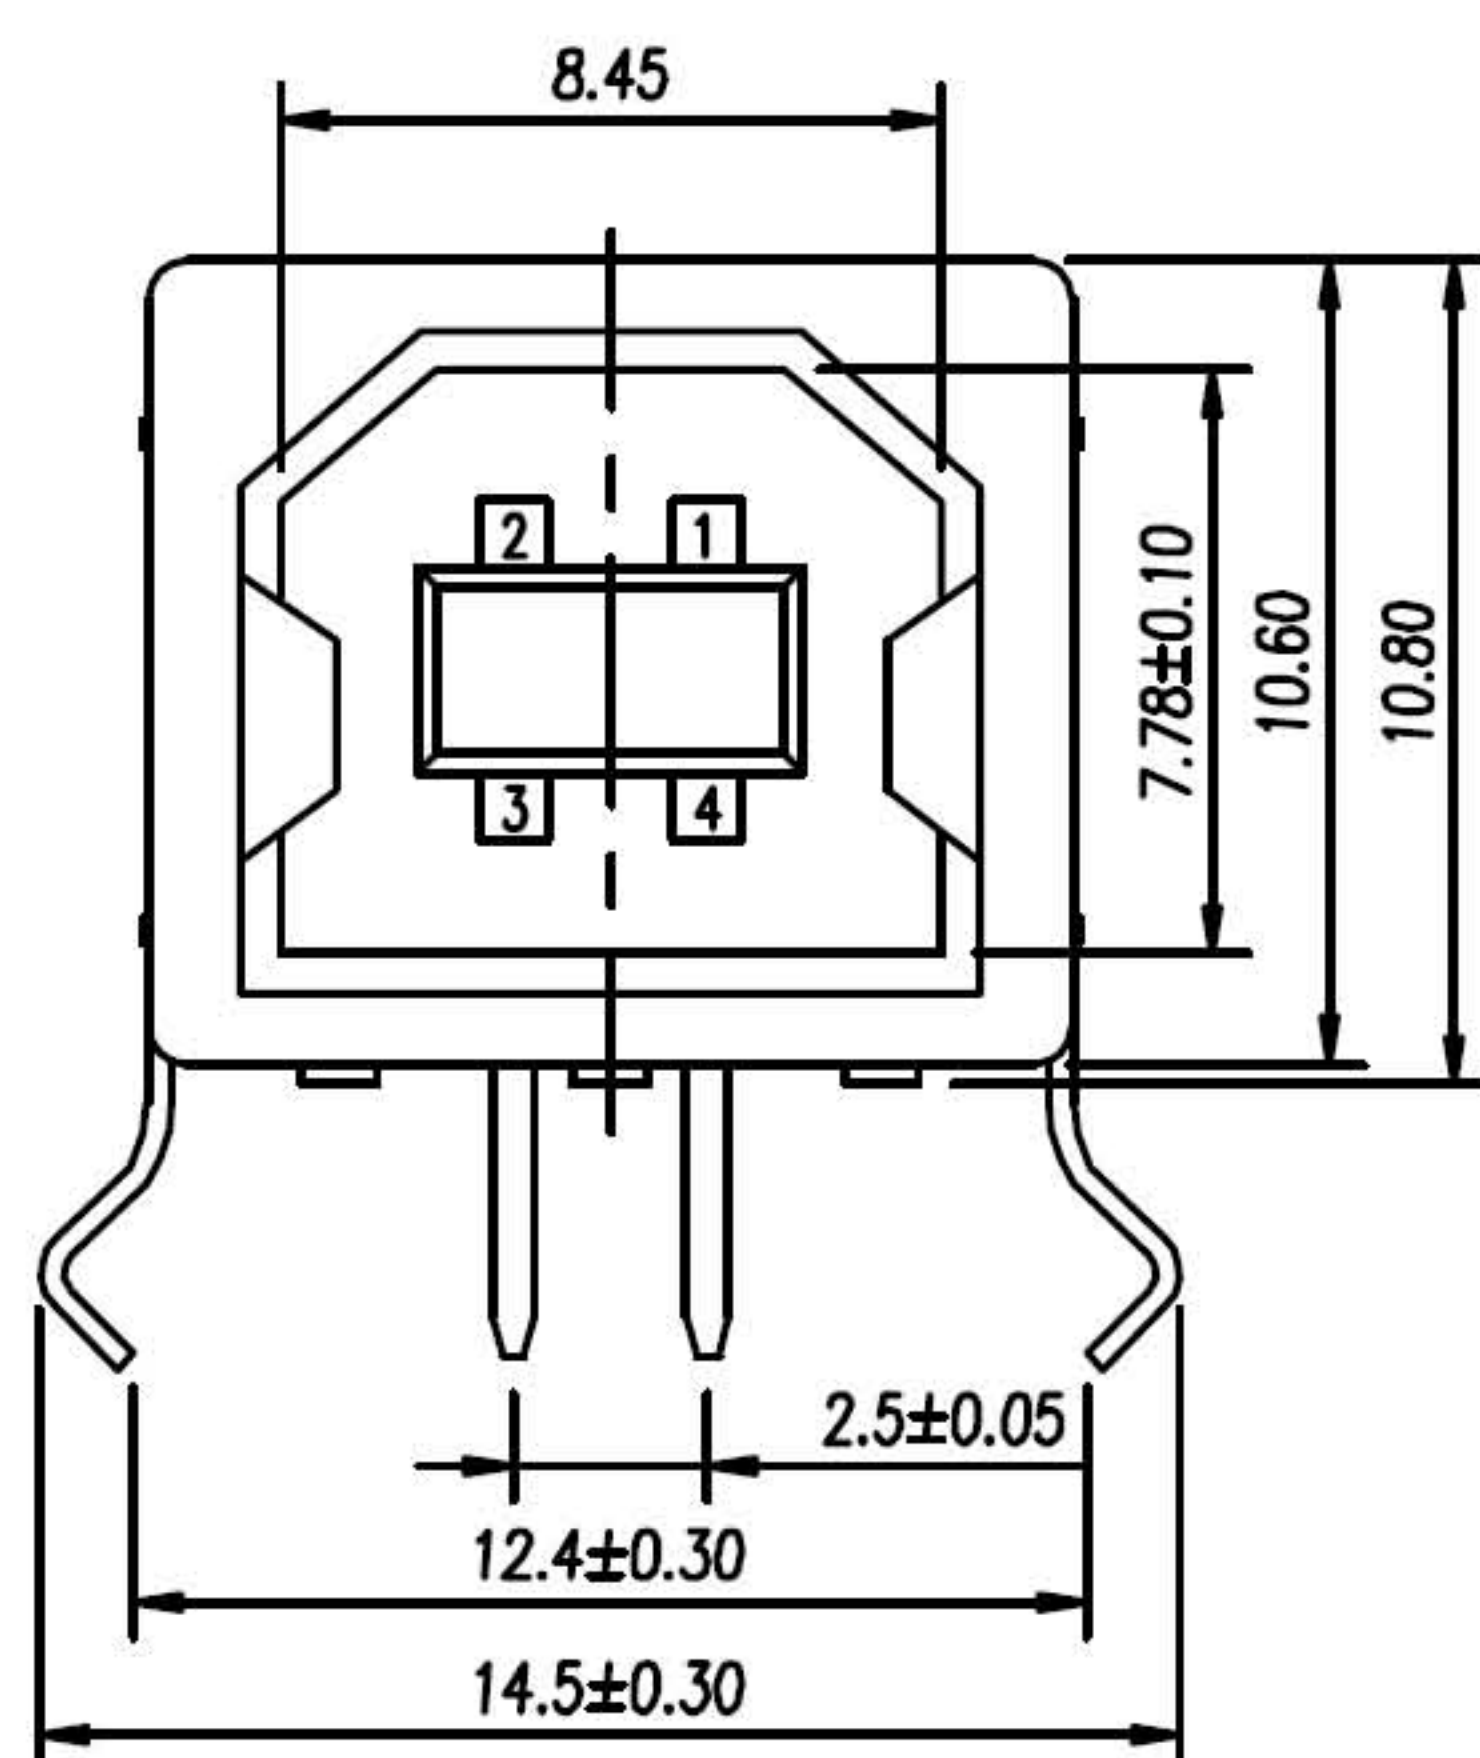

RECOMMENDED P.C.B. PATTERN LAYOUT

技术参数 Main specifications

- 1, 使用温度范围 $-55\sim 85^{\circ}\text{C}$
Temperature $-55\sim 85^{\circ}\text{C}$
- 2, 额定负荷 1Amp
Rated load 1Amp
- 3, 接触电阻 $\leq 0.03\Omega$
Contact Resistance $\leq 0.03\Omega$
- 4, 绝缘电阻 500M Ω Min(AT 500V DC)
Insulation Resistance 500M Ω Min (AT 500V DC)
- 5, 耐压 AC500V/min
Withstand voltage AC500V/min
- 6, 动作力 10~35N
Actuating Force 10~35N
- 7, 寿命 1500次
Life 1500次

接触件 TERMINAL

材质: H65(1) spcc(2)

Material: H65(1) spcc(2)

塑胶本体 HOUSING

材质: PBT

Material: PBT

东莞市迪松电子科技有限公司

TOLERANCE				TITLE: USB BF 90° DIP		DWG NO.:					
SELECT			✓			P/N: USB-210					
ON. \ TOL.	1	2	3			CUSTOMER PART/NO.: REL					
X.XXX ±	0.05	0.05	0.15								
X.XX ±	0.10	0.15	0.25			SCALE	UNIT	REV.	SHEET	DATE	
X.X ±	0.15	0.25	0.50			1:1	mm	A0	1 of 1	2007-02-18	
X ±	0.25	0.38	1.00								
XX ±	1'	2'	5'								
MATERIAL:				DR: 		CHKD: 刘志能			APPD:		