


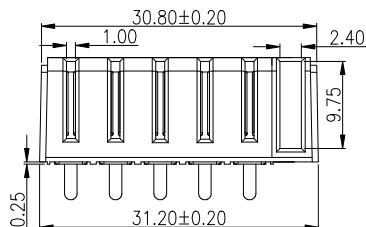




RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE

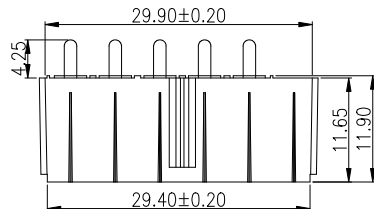

备注:

1. 产品规格:

1-1. 额定电压:30V

1-2. 耐电压:1000V AC MIN.

1-3. 接触阻抗:30mΩ MAX. INITIAL:40mΩ MAX
AFTER 3000 CYCLES

1-4. 绝缘电阻:1000MΩ MIN


1-5. 工作温度:-25°C TO +80°C

2. 材质:

2.1胶芯: PA9T UL94V-0/LCP BLACK

2.2端子: 合金铜, 镍底, GOLD

3. 所用材质须符合RoHS要求



RECOMMENDED P.C. BOARD LAYOUT

DISONG ELECTRONIC CO., LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	CONNECTOR		DRAWING	M.M.Zhang	DWG.No.	JD-009
PART NO.	C02F-A-5P-S2		CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL
	mm	OTHERWISE	ABOVE 5 TO 30	±0.3	0°±3°	SCALE
			ABOVE 30	±0.5		2:1
			ANGLE	±3°		PAGE
						1 OF 1