




REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	Eli	2016.04.07

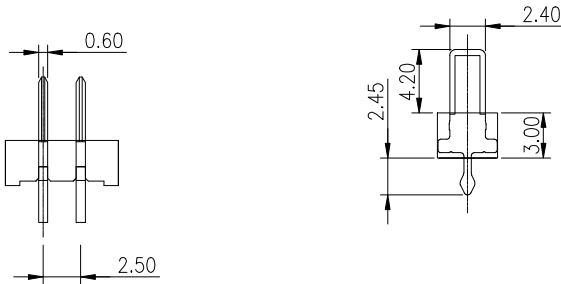

RECOMMENDED PCB LAYOUT
T=1.2MM,TOLERANCES±0.05MM

NOTE:

1. MATERIAL:

1.1 HOUSING: PA9T, UL 94V-0

1.2 TERMINAL: C2680

2. FINISH:

2.1 TERMINAL: NICKEL 50 u"MIN UNDER PLATED
OVERALL, Au PLATED ON THE CONTACT AREA.
OR Tin ON THE SOLDERING AREA.

3. PRODUCT SPECIFICATION

3.1 CURRENT RATING :5A

3.2 VOLTAGE RATING : 30V AC

3.3 DIELECTRIC WITHSTANDING VOLTAGE:500VAC

3.4 INSULATION RESISTANCE: 100MΩ min.

3.5 CONTACT RESISTANCE: 30mΩ Max.

3.6 Operating Temperature: -40° ~105°

DISONG ELECTRONIC CO.,LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ±0.25 X.x ±0.10 X.xx ±0.05 ANGULAR ±2°	DESIGN		DATE		TITLE: Battery 180° 2.5mm Pitches Male Connector
	APPROVED		DATE		
	PART NO	DS-B01M-A-2P-R1	REV: 01	SCALE: 1:1	UNIT: mm
	DRAWING NO	DS-B01M-A-2P-R1	SIZE: A4	SHEET: 1/1	