



RoHS  
Compliant

SYMBOL	REVISION	APPROVAL	DATE








备注:

- 产品规格:
  - 1-1. 额定电压:30V
  - 1-2. 耐电压:1000V AC MIN.
  - 1-3. 接触阻抗:30mΩ MAX. INITIAL;40mΩ MAX AFTER 3000 CYCLES
  - 1-4. 绝缘电阻:1000MΩ MIN
  - 1-5. 工作温度:-25°C TO +80°C

2. 材质:

1. 胶芯: PA9T UL94V-0/LCP BLACK
2. 2端子: 合金铜, 镀底, GOLD
3. 所用材质须符合RoHS要求

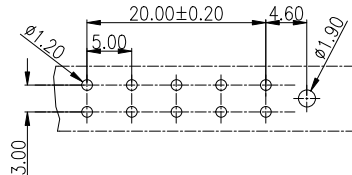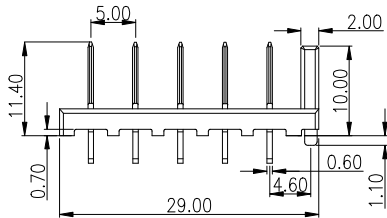

RECOMMENDED P.C. BOARD LAYOUT

DISONG ELECTRONIC CO., LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	CONNECTOR	DRAWING	M.M.Zhang	DWG.No.	JD-009
PART NO.	DS-C02M-A-5P-R3	CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL
	OTHERWISE	UP TO 5	±0.3	ANGLE	SCALE
		ABOVE 5	±0.5	0°±3'	2:1
		ABOVE 30	±0.5		PAGE
		ANGLE	±3'		1 OF 1