






RoHS
Compliant


SYMBOL	REVISION	APPROVAL	DATE

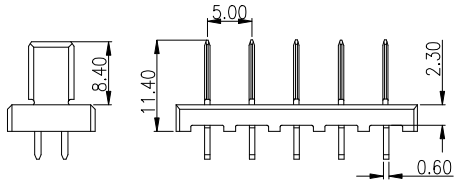

- 备注:
- 产品规格:
 - 1-1. 额定电压:30V
 - 1-2. 耐电压:1000V AC MIN.
 - 1-3. 接触阻抗:30mΩ MAX. INITIAL;40mΩ MAX AFTER 3000 CYCLES
 - 1-4. 绝缘电阻:1000Ω MIN
 - 1-5. 工作温度:-25°C TO +80°C
 - 材质:
 - 2.1 胶芯: PA9T UL94V-0/LCP BLACK
 - 2.2 端子: 合金铜, 镀底, GOLD
 - 所用材质须符合RoHS要求



PART NUMBER	PIN	Dim.A	Dim.B
公DS-C01M-A-2P-R3	02pin	12.00	5.00
公DS-C01M-A-3P-R3	03pin	17.00	10.00
公DS-C01M-A-4P-R3	04pin	22.00	15.00
公DS-C01M-A-5P-R3	05pin	27.00	20.00



RECOMMENDED P.C. BOARD LAYOUT

东莞市迪松电子科技有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	CONNECTOR	DRAWING	M.M.Zhang	DWG.No.	DS-057
PART NO.	公DS-C01M-A-2P/3P/4P/5P-R3	CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL
	OTHERWISE	ABOVE 5	±0.3	ANGLE	SCALE
		ABOVE 30	±0.5	0°±3'	2:1
		ANGLE	±3'	PAGE	1 OF 1