



RECOMMENDED P.C.BOARD LAYOUT (TOP VIEW)
TOLERANCES UNLESS OTHERWISE SPEC.±0.05



- 1.MATERIAL:
1.1.Housing:HI-TEMP Plastic,UL94V-0,black;
1.2.Terminal:Coppo alloy
1.3.Latch:Coppo alloy
- 2.FINISH:
2.1 Terminal: 3 u " Au plating on contact area,
2 u " Au plating on other area, underplated
nickel over all.
2.2 Latch: 2 u " Au plating on all area, underplated
nickel over all.
- 3.Electrical Performance:
3.1 Current rating (single pin):2A MAX.
3.2 Contact Resistance:50mΩ Max;
3.3 Dielectric Withstanding Voltage:
500V AC rms for 1 minut;
3.4 Insulation Resistance:1000 MΩ Min;
- 4.Mechanical Performance:
4.1 Durability:3000 cycles;
- 5.PACKING:Tape&Reel;
6.圖示尺寸有標註▲記號者為重點尺寸

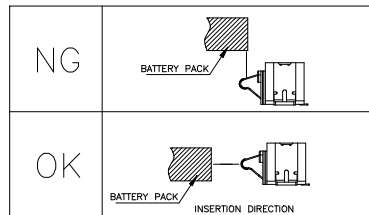

Rev.	ECN Number	Description	Drawn	Date
A		PRELIMINARY	PING	2018/6/19

迪松电子DISONG

GENERAL TOLERANCE		SCALE	1:1	DRAWN BY	DATE
XX. ±0.25	XXX. ° ±4°	UNIT	mm	CHECKED BY	DATE
X. ±0.20	XX. ° ±3°	SIZE	A4	APPROVED BY	DATE
.X ±0.15	X. ° ±2°				
.XX ±0.10	.X° ±1°				

DWG NO.	TITLE	REV
DS-162	4.3H 5PIN 3.0PITCH 電池连接器 成品檢驗圖	A
PART NO.		SHEET
BC-2-504		1/1