

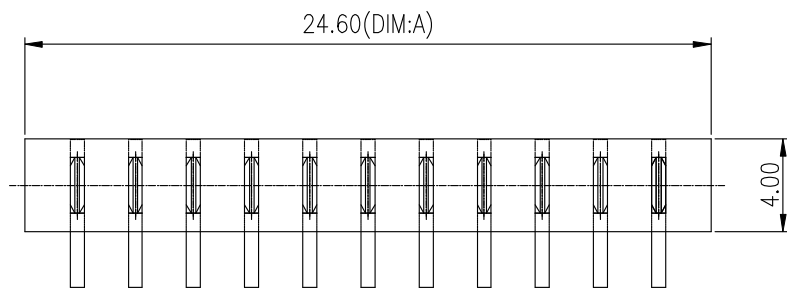
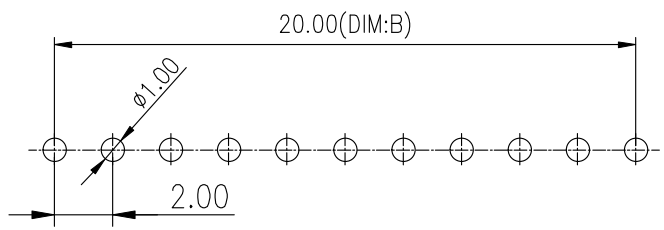


REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	Elih	2021.10.15



Material
 Insulator:LCP
 TERMINAL:phosphor Bronze
 TERMINAL:Plated Gold over Nickel or Tin
 Specification
 Current rating:5A
 instant CURRENT:7A
 Contact Resistance:30MΩ
 Insulation Resistance:100MΩ
 Dielectric Voltage:500V
 Operdting Temperature:-40°~105°

No. of Pins	Dimension	
	DIM.B	DIM.A
02	2.00	6.60
03	4.00	8.60
04	6.00	10.60
05	8.00	12.60
06	10.00	14.60
07	12.00	16.60
08	14.00	18.60
09	16.00	20.60
10	18.00	22.60
11	20.00	24.60
12	22.00	26.60
13	24.00	28.60
14	26.00	30.60
15	28.00	32.60
16	30.00	34.60

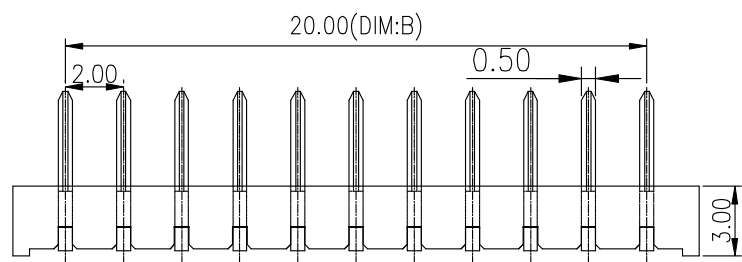

Recommended P.C.B Layout
 Layout Tolerance=+/-0.05mm

DISONG ELECTRONIC CO.,LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ±0.50 X.x ±0.30 X.xx ±0.20 ANGULAR ±2°	DESIGN		DATE		TITLE: Battery 90° 2.0mm Pitches Male Connector	
	APPROVED		DATE			
	PART NO	DS-A11M-A-R4	REV: 01	SCALE: 1:1	UNIT: mm	
	DRAWING NO	DS-A11M-A-R4	SIZE: A4	SHEET: 1/1		