
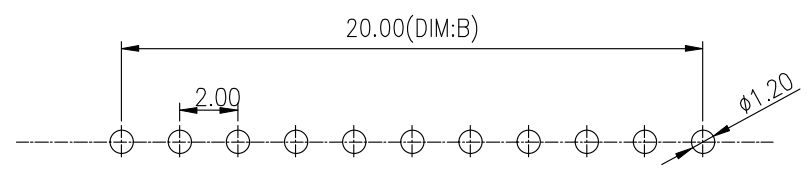
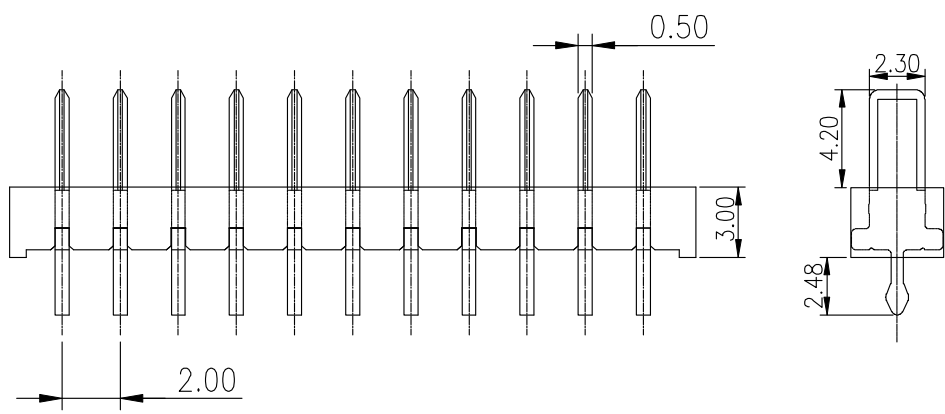


REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	Elih	2016.04.07

Material  
 Insulator:LCP  
 TERMINAL:phosphor Bronze  
 TERMINAL Plated:Gold over Nickel or Tin  
 Specification  
 Current rating:5A  
 instant CURRENT:7A  
 Contact Resistance:30MΩ  
 Insulation Resistance:100MΩ  
 Dielectric Voltage:500V  
 Operdting Temperature:-40°~105°

No. of Pins	Dimension	
	DIM.B	DIM.A
02	2.00	6.60
03	4.00	8.60
04	6.00	10.60
05	8.00	12.60
06	10.00	14.60
07	12.00	16.60
08	14.00	18.60
09	16.00	20.60
10	18.00	22.60
11	20.00	24.60
12	22.00	26.60
13	24.00	28.60
14	26.00	30.60
15	28.00	32.60
16	30.00	34.60

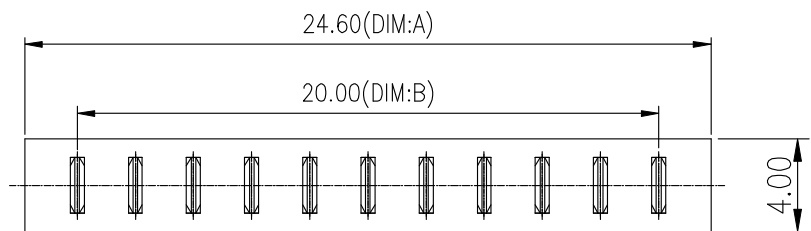

Recommended P.C.B Layout  
 Layout Tolerance=+/-0.05mm

DISONG ELECTRONIC CO.,LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ±0.25 X.x ±0.10 X.xx ±0.05 ANGULAR ±2'	DESIGN		DATE		TITLE: Battery 180° 2.0mm Pitches Male Connector	
	APPROVED		DATE			
	PART NO	DS-A11M-A-R1	REV:	01	SCALE: 1:1	UNIT: mm
	DRAWING NO	DS-A11M-A-R1	SIZE:	A4	SHEET: 1/1	