

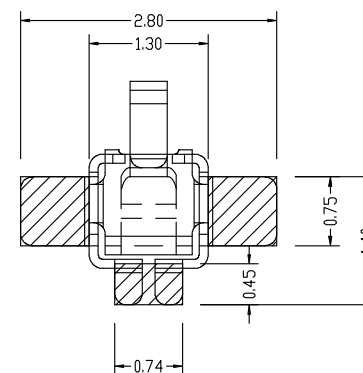

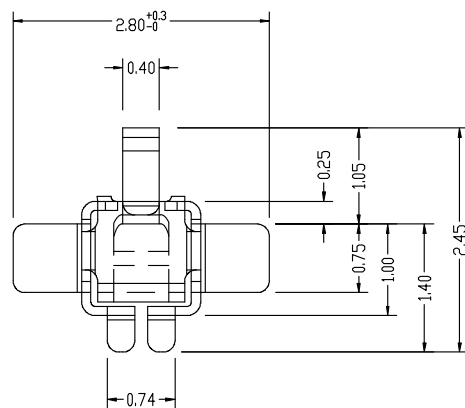


| Rev. | ECN Number | Description | Date | Drawn | Checkd | Approved |
|------|------------|-------------|------|-------|--------|----------|
|      |            |             |      |       |        |          |



RECOMMENDED PCB LAYOUT  
TOLERANCE ±0.05MM



工作状态

技术要求:

- 1, 材质: SUS304, 厚度 $0.1 \pm 0.005\text{mm}$
- 2, 焊锡面不允许有毛边, 其余部位毛边最大0.03毫米
- 3, 标示有"○"为重点控制及检验尺寸
- 4, 电镀要求:  
镍底50~100U", 接触点及焊盘区域镀金1U"
- 5, 工作高度位置弹力在50~70gf之间

DISONG

GENERAL TOLERANCE

|           |            |
|-----------|------------|
| XX. ±0.50 |            |
| X. ±0.35  | X.° ±2.0°  |
| .X ±0.25  | .X° ±1.0°  |
| .XX ±0.15 | .XX° ±0.5° |

SCALE:

1:1

UNIT:

mm

SIZE:

A4



DRAWN

陈桂昌

DATE

2021. 11. 30

CHECK

DATE

APPROVE

DATE

DWG. NO.

PARTS NO.(INTENDED USE)

AS-201

TITLE

<CUSTOMER DRAWING>

RF Antenna Spring,SMT,  
L2.8\*W2.45\*H1.6mm

REV.

A

SHEET

1/1