

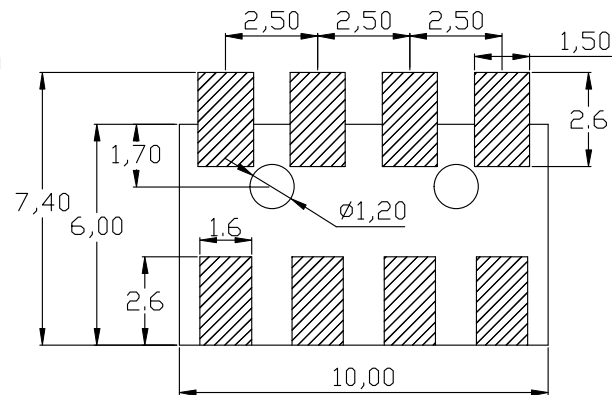
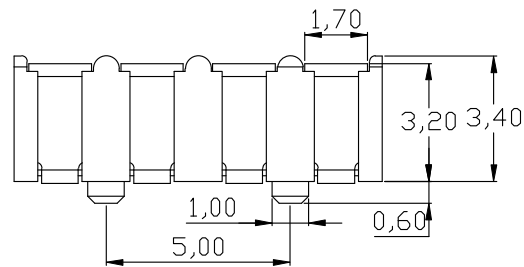
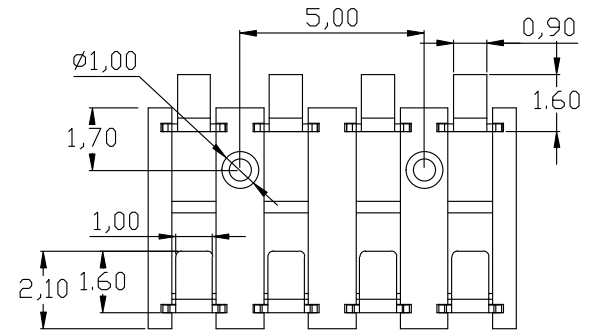



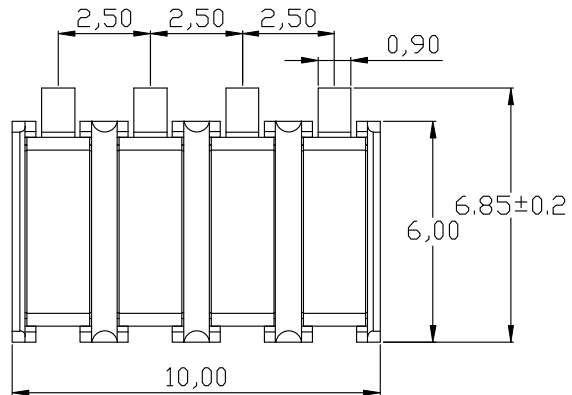

RECOMMENDED PCB LAYOUT
TOP VIEW (.XX±0.05)

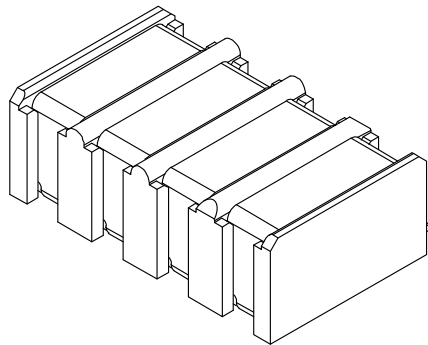

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ MAX

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

使用寿命: 5000次以上

塑件(材质): LCP BLACK

接触点(材质): 黄铜C2680,

接触面镀金3U, 焊脚镀金1U

2	HOUSING	PA9T	1	BLACK
1	CONTACT TERMINAL	BRASS	3	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

DISONG ELECTRONIC CO., LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	CONNECTOR			DRAWING	G.B.Wu	DWG.No.	DS-BC-101
PART NO.	BC-0-401A			CHECK	Q.L.Dai	REV.	A0
UNIT	TOLERANCE	OTHERWISE	ANGLE	APPROVAL	DATE	28-08-2017	
mm	UP TO 5 ABOVE 5 30 ~ ABOVE 30	±0.2 ±0.3 ±0.5 ±3"	0°~3°	SCALE	2:1	PAGE	1 OF 1