


RoHS  
Compliant

| SYMBOL | REVISION | APPROVAL | DATE |
|--------|----------|----------|------|
|        |          |          |      |
|        |          |          |      |

Note:  
 1: Material (材料)  
 Housing: PA46 (胶芯:PA46)  
 Plunger: Brass C3604 (针轴: 国标黄铜 C3604)  
 2: Plating (电镀)  
 Plunger: 2u' Au over 80~100u' Ni (针轴 镀金2u', 镍底80~100u')  
 3: Electrical (电气特性)  
 Rated Current & Voltage: DC 12v: 2A (额定电压&电流: 直流12v: 2A)  
 Contact Resistance: 50 mohm Max. at working height.  
 接触电阻: 接触最大阻抗30毫欧 (接触工作高度停止状态下)  
 4: Mechanical (机械性能):  
 Full stroke: 10000cycles (min) 寿命10000次以上

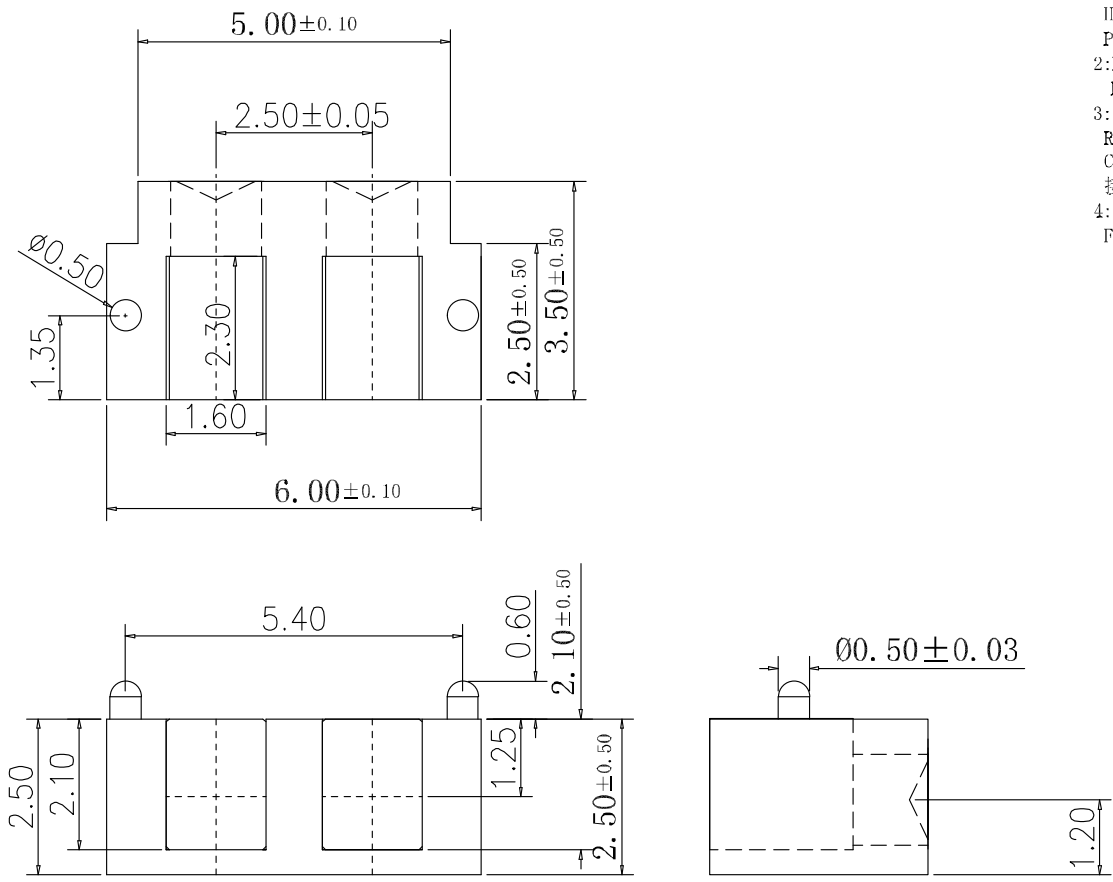

|     |                  |          |      |           |
|-----|------------------|----------|------|-----------|
| 2   | HOUSING          | PPA      | 1    | BLACK     |
| 1   | CONTACT TERMINAL | C70350   | 2    | Au PLATED |
| NO. | PARTS            | MATERIAL | QTY. | FINISHING |

东莞市迪松电子科技有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

| PART NAME   |           | CONNECTOR            |        | DRAWING  |      | DWG. No. |  |
|-------------|-----------|----------------------|--------|----------|------|----------|--|
| PART NO.    |           | PG-0-201             |        | CHECK    |      | REV. A0  |  |
| UNIT:<br>mm | TOLERANCE | UP TO 5<br>±0.2      | ANGLE  | APPROVAL | DATE |          |  |
|             | OTHERWISE | ABOVE 5 ~ 30<br>±0.3 | 0° ±3° | SCALE    | PAGE |          |  |
|             |           | ABOVE 30<br>±0.5     |        | 2:1      |      | 1 OF 1   |  |
|             |           | ANGLE<br>±3°         |        |          |      |          |  |

F E D C B A