
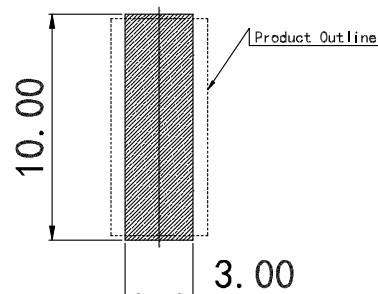


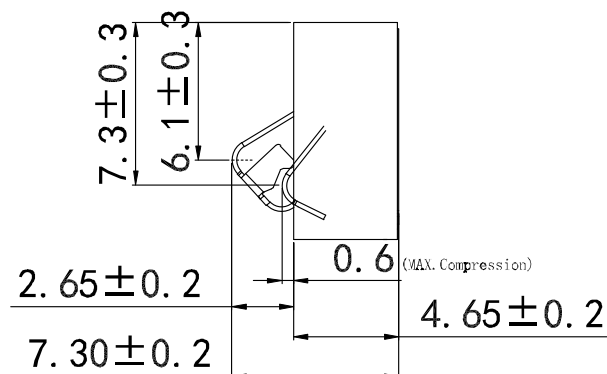


RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE

SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: DC 12V 3A
 - 1-2. CONTACT RESISTANCE: 50mΩ MAX (INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: 500MΩ MIN,
MEASURED BY 500V DC
- LIFE TEST: MECHANICAL LIFE TEST 5,000 CYCLES.
- TEMPERATURE RISE : 30° C MAX



P. C. B LAYOUT

2	HOUSING	LCP	1	GRAY
1	CONTACT TERMINAL	PHOSPHOR BRONZE	1	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

DISONG ELECTRONIC CO., LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	CONNECTOR		DRAWING	Y. C. Zhang	DWG. No.	
PART NO.	BC-1-103		CHECK	G. C. Chen	REV.	A1
	UNIT :	TOLERANCE	ANGLE	APPROVAL	DATE	10-10-2022
	mm	OTHERWISE	0° ±3°	SCALE	PAGE	1 OF 1