

性能:

额定电流: 1.0A

额定电压: 12V

耐电压: 500V






接触电阻: 30mΩ MAX

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP E130I

接触点(材质): 铜合金, 触点镀金15μ

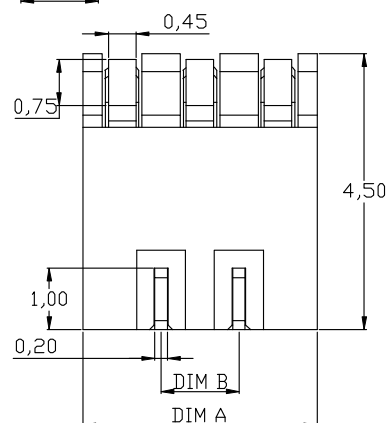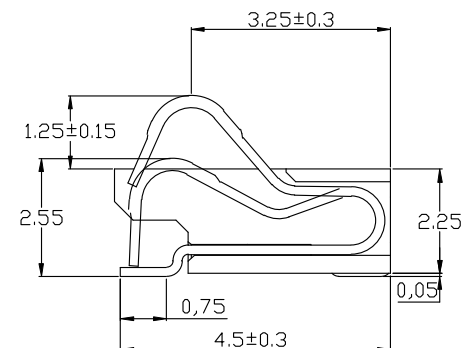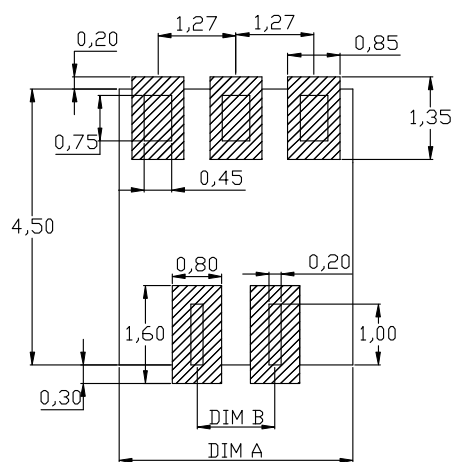

RECOMMENDED PCB LAYOUT

TOP VIEW(.XX±0.05)

PART NO.	DIM A	DIM B
BC-1-217A	2.54	
BC-1-337A	3.81	1.27
BC-1-427A	5.08	2.54
BC-1-512A	6.35	3.81
BC-1-612A	7.62	5.08

2	HOUSING	LCP	1	BLACK	
1	CONTACT TERMINAL	PHOSPHOR BRONZE	3	Au PLATED	
NO.	PARTS	MATERIAL	QTY.	FINISHING	
CONNECTOR		DRAWING	G.B.Wu	DWG.No.	DS-BC-112
BC-1-217A 337A 427A 512A 612A		CHECK	Q.L.Dai	REV.	A0
TOLERANCE	UP TO 5	±0.2	APPROVAL	DATE	23-04-2022
	ABOVE 5 30 ~	±0.3			
OTHERWISE	ABOVE 30	±0.5	SCALE	PAGE	1 OF 1
	ANGLE	0°±3'			
UNIT :		mm			

DISONG ELECTRONIC CO., LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.