



PCB LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

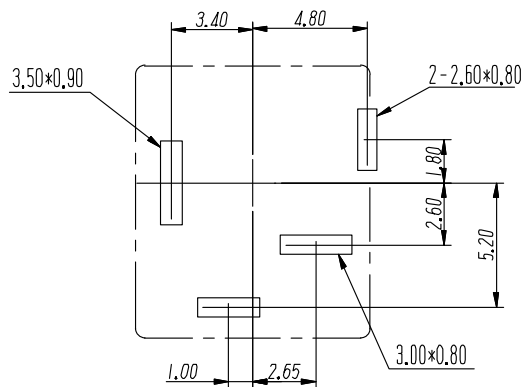

SCHEMATIC



技术特性:

使用条件: -30 ~ 70 °
 额定负荷: DC 30V 10A
 接触电阻: ≤ 0.02W
 绝缘电阻: ≥ 100mW DC250V
 耐压: AC250V(50Hz)/min
 插拔力: 3~15N
 寿命: 5000次

序号	名称	数量	材料	备
6	平片	1	H62黄铜带(Y) δ=0.40mm	D. Cu/Sn
5	簧片	1	磷铜0.65 δ=0.30mm	D. Cu/Sn
4	插针PIN	1	H59黄铜(Y)	D. Cu/Sn
3	外壳	1	H62黄铜带 δ=0.2mm	D. Cu/Sn
2	弹片	1	磷铜0.65 δ=0.30mm	D. Sn/Sb
1	基座	1	PA9T	黑

GENERAL TOLERANCES			DRAWN	C		TITLE: 电源插座	
0.X	±0.30	X.° ±3°	DESIGN	PART NO.		DC-012G	
0.XX	±0.20		CHECKED	PRODUCT NO.			
0.XXX	±0.10	X.X° ±1°	APPROVED	DRAWING NO.			
UNIT	SIZE	SCALE	UNIT: mm		SCALE: 1:1	REV: 01-1 SHT: 10F 1	
MM	A4	1:1					

东莞市迪松电子科技有限公司

ECN NO.	REV	DATE	DESCRIPTION	MDF'D	APP'D
	01	2022.04.26	NEW DRAWING RELEASE		